

调整螺丝块

沉孔型·沉孔带螺纹型

定位导向零件



型号(1 代码·2 M) — (3 H)
DBBS5 — 10

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: 7 天发货
代码

调整螺丝块 — 沉孔型 — (H)



代码	材质	表面处理
DBBS	S45C	发黑
DBES		无电解镀镍

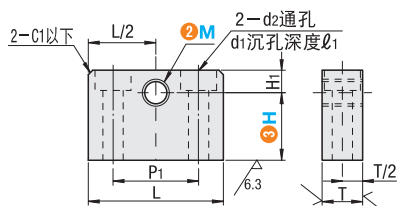

25/(√6.3/)

型号		DBBS				DBES				H ₁	T	M×螺距 粗牙螺纹	L	P ₁	d ₁	d ₂	ℓ ₁		
① 代码	② M	③ H选择				③ H选择													
(粗牙螺纹) DBBS DBES	4	5	6			5	6			4	7	4×0.7	21	13	6	3.5	3.5		
	5	5	6	7	8	10	5	6	7		8	10						5×0.8	
	6	5	6	7	8	10	5	6	7	8	10	5	9	6×1.0	30	19	8	4.5	4.5
	8	6	7	8	10	6	7	8	10	6	12	8×1.25							
	10				8	10			8	10	7	12	10×1.5	40					



型号(1 代码·2 M) — (3 H)
DBBS5 — 20

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: 7 天发货
代码

调整螺丝块 — 沉孔带螺纹型 — (H尺寸指定型)



代码		材质	表面处理
粗牙螺纹	细牙螺纹		
DBBS	DBBSBS	SS400	发黑
DBES	DBESBS		无电解镀镍
DBBS	DBBSBS	SUS304	—

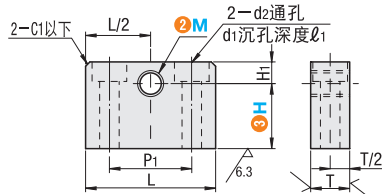

25/(√6.3/)

型号		③ H 最小单位 1mm	H1	T	M×螺距		L	P1	d1	d2	l1
① 代码	② M				粗牙螺纹	细牙螺纹					
(粗牙螺纹)	3	3~20	3	7	3×0.5	3×0.35	21	13	6	3.5	3.5
	4	4~20	4		4×0.7	4×0.5					
	5	4~20	5		5×0.8	5×0.5					
	6	5~20	6	9	6×1.0	6×0.75	30	19	8	4.5	4.5
(细牙螺纹)	8	6~20	8		8×1.25	8×0.75					
	10	7~20	7		10×1.5	10×1.0	40	25.2	9.5	5.5	5.5
	12	8~20	8	12	12×1.75	12×1.0					



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达