

# 定位销 大头圆锥型

内螺纹型 · DP公差 · 锥头R选择型

# 定位销/夹具衬套



定位销  
夹具衬套

20



■ 请按步骤①~④选择型号和参数后进行订购。

型号(①代码 · ②D公差 · ③P公差 · ④D) | — ⑥P — ⑧L — ⑦B — ⑧E — ⑨R

DASKPBTMS

— P12.00— L10 — B4.0 — E6.0 — R20




型号区分: 7 天发货

代码



代码	材质	表面处理	硬度
DAKPBT	SKS3	—	淬火硬度60~63HRC
DAGKPB	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACKPBT	SUS440C	—	淬火硬度50~55HRC
DASKPBT	SUS304	—	—

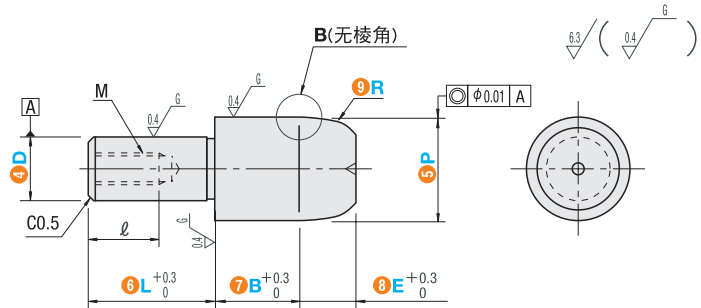


### ■ 公差选择

D 或 P	② · ③D · P公差				
	M	P	G	H	S
6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	-0.01
6.01~10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01~18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01~30.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

### ■ 内螺纹底孔表

螺纹直径	M2.6	M3	M4	M5	M6	M8
底孔直径d <sub>2</sub>	2.3	2.6	3.4	4.3	5.1	6.9
底孔深度U	8.5	9.5	12	14.5	17	21

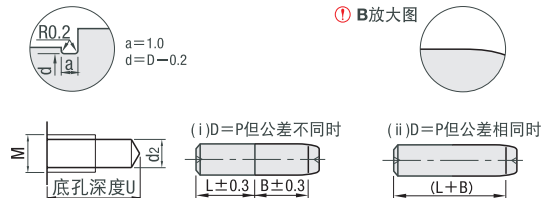

① 代码	型号			⑤ P 最小单位0.01mm	⑧ L 最小单位1mm	⑦ B 最小单位0.5mm	⑧ E 最小单位0.5mm	⑨ R 选择	D	M (粗牙螺纹)	ℓ
	② D公差 选择	③ P公差 选择	④ D								
DAKPBT DAGKPB DACKPBT DASKPBT	M P G H	S M P G H	6	6.00~10.00	6~12	3.0~12.0	1.0~20.0	5 10 15 20 25 30 35 40	6	M3	5
			6T						6	M2.6	4
			8	8.00~13.00	8~16	3.0~14.0			8	M5	8
			8T						8	M4	6
			10	10.00~15.00	10~20	3.0~16.0			10	M5	8
			10T						10	M4	6
			12	12.00~16.00	12~24	3.0~18.0			12	M5	8
			12T						12	M4	6
			13	13.00~18.00	13~26	3.0~20.0			13	M8	10
			13T						13	M6	9
			16	16.00~25.00	16~32	3.0~20.0			16	M8	12
			16T						16	M6	9
			20	20.00~30.00	20~40	3.0~20.0			20	M8	12
20T	20	M6	9								

① 最小单位的值取决于P尺寸。请确认“E尺寸·R尺寸详细最小单位范围”表。

### ■ E尺寸·R尺寸详细最小单位范围

P 最小单位0.01mm	E 最小单位0.5mm	R选择
6.00~ 8.00	2.5~ 4.0	10 15
8.01~12.00	4.5~ 7.0	10 15 20
12.01~16.00	5.0~10.0	15 20 25
16.01~20.00	5.0~15.0	20 25 30
20.01~25.00	5.0~15.0	25 30 35
25.01~30.00	5.0~20.0	30 35 40



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达