

定位销/夹具衬套

定位销 大头锥角型



型号(1 代码·2 NO.)

DAFBTA10
DASFBTD12T

3 P

— P11.01 — L12 — B6.4
— P13.97 — L13 — B5

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分：

代码 7 大友货




代 码		材 质	表 面 处 理	硬 度
圆 型	多 棱 型			
DAFBTA	DAFBTD	SKS3	—	淬火硬度60~63HRC
DAGFBTA	DAGFBTD	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度 750HV
DACFBTA	DACFBTD	SKS3	—	淬火硬度50~55HRC
DASFBTA	DASFBTD	SUS304	—	—

■D尺寸公差


No.	D	g6
6	6	-0.004 -0.012
8 · 8T	8	-0.005 -0.014
10 · 10T	10	
12 · 12T	12	-0.006 -0.017
13 · 13T	13	
16 · 16T	16	
20 · 20T	20	-0.007 -0.020

■内螺纹底孔表




螺纹直径	M3	M4	M5	M6	M8
底孔直径d ₂	2.6	3.4	4.3	5.1	6.9
底孔深度U	9.5	12	14.5	17	21

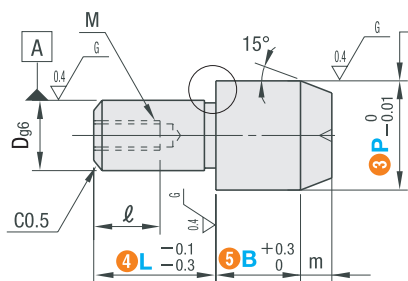

(圓型)



(多棱型)



型号		①P 最小单位0.01mm	①L 最小单位1mm		①B 最小单位0.1mm	m	D	M (粗牙 螺纹)	ℓ	(W)	
① 代码	②No.		圆型	多棱型							
DAFBTA DAGFBTA DACFBTA DASFBTA	<圆型> <多棱型>	6	6.50~10.00	6~12	9~12	1.5~15.0 (12.0)	3	6	M3	5	3
		8	8.50~13.00	8~16	12~16	1.5~30.0 (15.0)	4	8	M5	8	3.5
		8T		6~16	12~16		4	8	M4	6	3.5
		10	11.00~17.00	10~20	12~20	3.0~30.0 (20.0)	4	10	M5	8	4
		10T		6~16	12~16		4	10	M4	6	4
		12	13.00~18.00	12~24	12~24	3.0~30.0 (20.0)	4	12	M5	8	5
		12T		8~18	12~18		4	12	M4	6	5
		13	14.00~20.00	13~26	14~26	5.0~30.0 (20.0)	4	13	M8	10	5.5
		13T		8~20	14~20		4	13	M6	9	5.5
		16	17.00~27.00	16~32	16~32	5.0~30.0 (27.0)	5	16	M8	12	7
		16T		10~24	14~24		5	16	M6	9	7
		20	22.00~30.00	20~40	20~40	5.0~30.0	5	20	M8	12	9
		20T		12~30	18~30		5	20	M6	9	9

①B()尺寸适用于多棱型。