



型号(①代码·②D_{H8}) — ③L
DALB10 — 12
DALBZ12 — 20

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④ 7 天发货
代码

■ 直杆型




D _{H8}	D _{H8} 公差 H8	D _{1m6}	D _{1m6} 公差 m6
5	+0.018 0	10	+0.015 +0.006
6		12	
8	+0.022 0	14	+0.018 +0.007
10		16	
12		18	
13	+0.027 0	22	
15		25	+0.021 +0.008
16		26	
20	+0.033 0	30	+0.025 +0.009
25		35	

代码	材质	硬度
DALB	SUJ2	淬火硬度58HRC~

6.3 (0.4 G 0.2 G)

DALB(标准型)

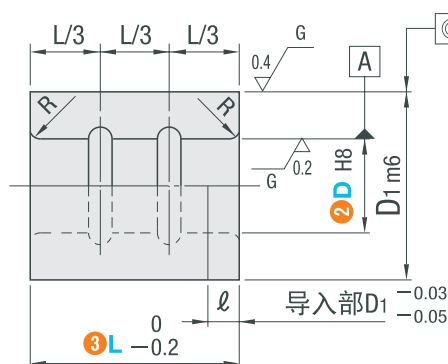

① 代码	② D _{H8}	③ L选择	D _{1m6}	ℓ	R
(标准型) DALB	5	5 6 8 10 12 16	10	1.5	0.5
	6	6 8 10 12 16	12	2	
	8	8 10 12 16 20	14	3	1
	10		16		
	12	10 12 16 20 25	18		1.2
	13		22		
	15	16 20 25 30	25	4	1.5
	16		26		
	20	16 20 25 30	30		2
	25	20 25 30 35	35		



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达