




■ 六角型



代码	材质	表面处理
BDLHB	S45C	发黑
BDPLHB		无电解镀锌
BDSLHB	SUS304	—

6.3/(1.6/)

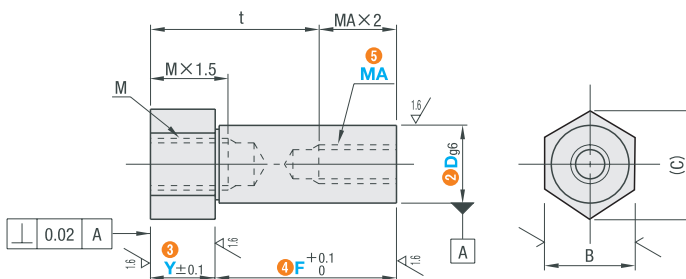

型号 ① 代码	②Dg6		最小单位 1mm		⑤MA (粗牙螺纹) 选择	M (粗牙螺纹)	B	(C)	D	M	t
			③Y	④F							
BDLHB BDPLHB BDSLHB	6	—0.004 —0.012	2~60	5~100	3	M3	8	9.2	6	M3	11
	8	—0.005 —0.014			4	M4	10	11.5	8	M4	12.5
	10				4 5 6	M6	13	15.0	10	M6	14
	12	—0.006 —0.017	10~100	5 6 8	M8	14	16.2	12	M8	17	
	15			6 8 10	M10	17	19.6	15	M10	20	
	20	—0.007 —0.020	4~60	6 8 10 12	M12	24	27.7	20	M12	25	



型号(① 代码·② D) — ③ Y — ④ F — ⑤ MA — (APC)
BDFHB20 — 50 — F32 — MA10 — APC

可选加工	嵌入加工																						
代码	APC																						
技术说明	在座面部分嵌入加工。 ① 所有型号适用																						
	<table><tr><td>指定方法</td><td>APC</td></tr><tr><td>D</td><td>M</td><td>APCg6</td></tr><tr><td>6</td><td>M3</td><td>6</td></tr><tr><td>8</td><td>M4</td><td>8</td></tr><tr><td>10</td><td>M6</td><td>10</td></tr><tr><td>12</td><td>M8</td><td>12</td></tr><tr><td>15</td><td>M10</td><td>15</td></tr><tr><td>20</td><td>M12</td><td>20</td></tr></table>	指定方法	APC	D	M	APCg6	6	M3	6	8	M4	8	10	M6	10	12	M8	12	15	M10	15	20	M12
指定方法	APC																						
D	M	APCg6																					
6	M3	6																					
8	M4	8																					
10	M6	10																					
12	M8	12																					
15	M10	15																					
20	M12	20																					

