



歧管块

液·水压用/气压用歧管块 T字型




型号 (1) 代码 (2) 连续孔数 — (3) No. — 11


■ 请按步骤 1~3 选择型号和参数后进行订购。



型号区分: 7 天发货

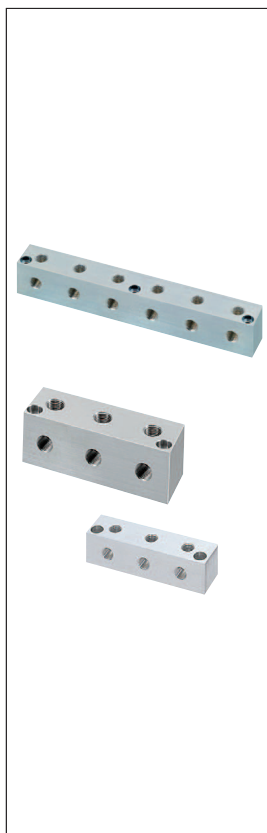

代码	材质	表面处理	最高使用压力
FCAN	S45C	镀锌	20.6MPa≈210kgf/cm ² 以下
FCANR	SUS304	—	
FCGN	铝合金	—	1MPa≈10kgf/cm ² 以下

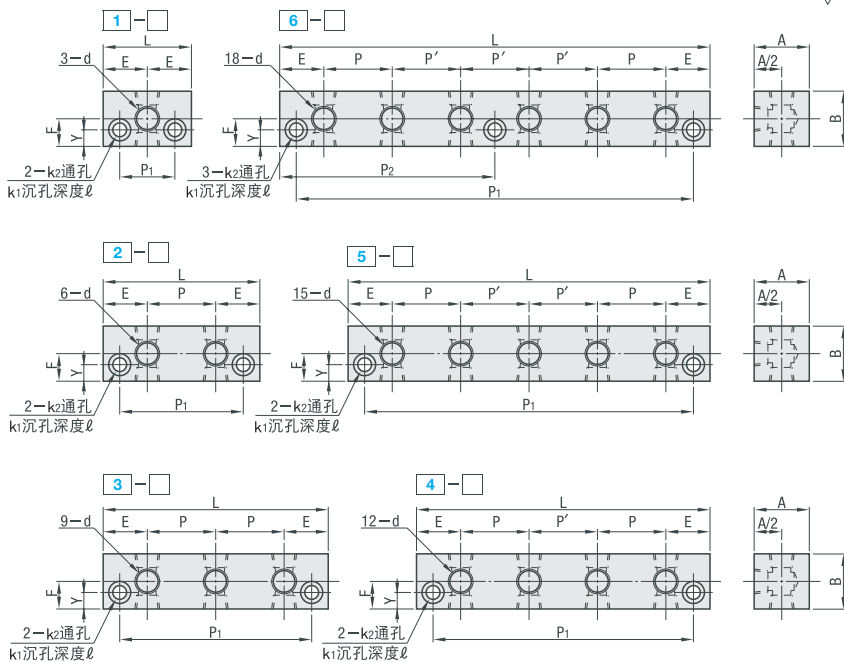

型号		③ No.	d Rc(PT)	A	B	L	P	P'	P ₁	P ₂	E	F	Y	k ₁	k ₂	ℓ		
① 代码	② 连续孔数																	
FCAN (液·水压用)	1	11	1/8	40	30	40	—	—	25	—	20	B/2	7	11	6.6	6.5		
		22	1/4															
	2	11	1/8		30	80	40	—	65	—	65						—	20
		22	1/4															
		33	3/8															
	3	11	1/8		30	120	40	—	105	—	105						—	20
		22	1/4															
		33	3/8															
	4	11	1/8		30	160	40	40	40	145	—						20	20
		22	1/4															
		33	3/8															
	5	11	1/8		30	200	40	40	40	185	—						20	20
22		1/4																
33		3/8																
6	11	1/8	30	240	40	40	40	225	120	20	20							
	22	1/4																
	33	3/8																

型号		③ No.	d Rc(PT)	A	B	L	P	P'	P ₁	P ₂	E	F	Y	k ₁	k ₂	ℓ		
① 代码	② 连续孔数																	
FCGN (气压用)	1	11	1/8	25	25	40	—	—	25	—	20	12.5	7	9.5	5.5	5.5		
		22N	1/4														35	35
	2	11	1/8		25	25	70	30	—	55	—						20	12.5
		22N	1/4															
	3	11	1/8		25	25	100	30	—	85	—						20	12.5
		22N	1/4															
	4	11	1/8		25	25	130	30	30	115	—						20	12.5
		22N	1/4															
	5	11	1/8		25	25	160	30	30	145	—						20	12.5
		22N	1/4															
	6	11	1/8		25	25	190	30	30	175	95						20	12.5
		22N	1/4															

