

定位销/夹具衬套

定位销 小头球面型

DP公差选择



■ 请按步骤①~⑨选择型号和参数后进行订购。

型号(① 代码 · ② D公差 · ③ P公差 · ④ D)

DAKQSAGS10
DASKQSDPS8

— **5 P** — **6 L** — **7 B**

—	P8.00	—	L10	—	B8.0
—	P5.50	—	L8	—	B5.0



型号区分:

代码


7 天发货



代 码		材 质	表 面 处 理	硬 度
圆 型	多 棱 型			
DAKQSA	DAKQSD	SKS3	—	淬火硬度60～63HRC
DAGKQSA	—	SKS3	镀硬铬 厚度3μm以上	淬火硬度50～55HRC 镀层硬度 750HV～
DACKQSA	—	SUS440C	—	淬火硬度50～55HRC
DASKQSA	DASKQSD	SUS304	—	—

公差选择

D 或 P	② · ③ · D · P 公差				
	M	p	G	H	S
1.50 ~ 3.00	+0.008 +0.012	+0.012 +0.006	-0.002 -0.008	0 -0.010	
3.01 ~ 6.00	+0.012 +0.004	+0.020 -0.012	-0.004 -0.012		
6.01 ~ 10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	0 -0.01
10.01 ~ 18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01 ~ 20.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

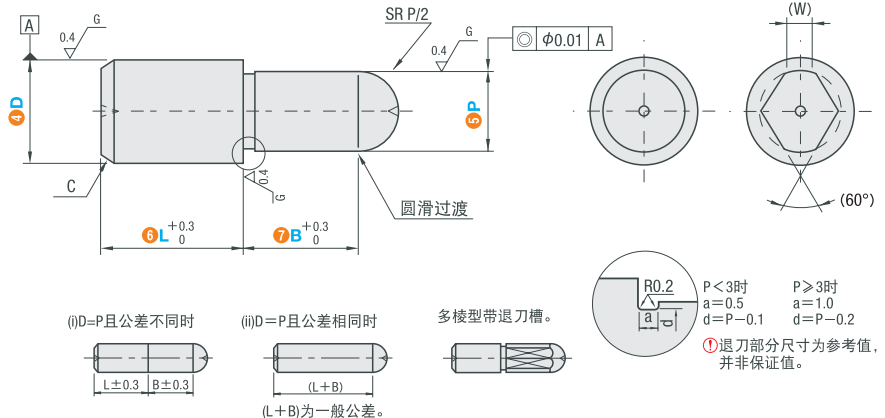

型号				9P	6L	7B	C	(W)
① 代码	②D公差选择	③P公差选择	④D	最小单位 0.01mm	最小单位 1mm	最小单位 0.1mm		
<圆型> <多棱型> ①适用于D≥4 DAKQSA DAKQSD DACKQSA DASKQSD DASKQSA	M P G H	M P G H S	2	1.50~2.00	2~ 5	2.0~10.0	0.3	—
			3	1.50~3.00	3~10	2.0~10.0	0.5	1
			4	1.50 (2.00) ~4.00	4~10	2.0~10.0	1	1
			5	2.00~5.00	5~10	2.0~15.0 (10.0)	1	1.2
			6	2.00~6.00	5~17	2.0~15.0	1	1.5
			8	3.00~8.00	8~21	2.0~20.0 (15.0)	1.5	1.8
			10	3.00~10.00	10~23	3.0~20.0	2	2.2
			12	5.00~12.00	12~24	3.0~30.0 (25.0)	2	2.5
			13	6.00~13.00	13~26	5.0~30.0 (25.0)	2	3
			16	10.00~16.00	16~32	5.0~30.0	3	4
			20	13.00~20.00	20~40	5.0~30.0	3	5

①P·B()尺寸适用于多棱型。