



型号(①代码·②d) — ③L
DAH5 — 8

■请按步骤①~③选择型号和参数后进行订购。



型号区分: ④天发货
代码

定位销
夹具衬套


20

■标准型



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAH	DAHM	SKS3	—	淬火硬度60HRC~
DAHN	DAHMN	SKS3	无电解镀镍	淬火硬度60HRC~
DAHC	—	SUS440C	—	淬火硬度50~55HRC

25 / (6.3 / 0.4) G

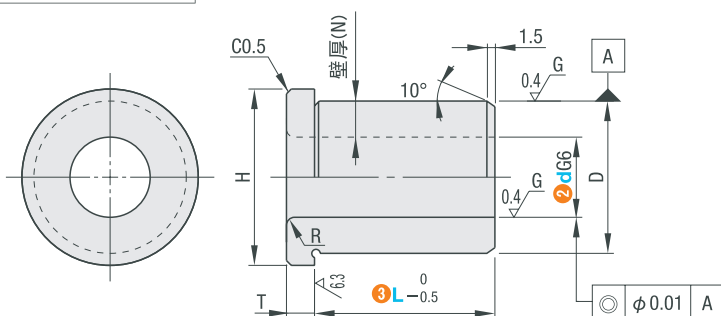

d	d公差	
	无表面处理	无电解镀镍
2	+0.008	+0.010
3	+0.002	0
4	+0.012	+0.012
5	+0.004	0
6		
8	+0.014	+0.014
10	+0.005	+0.005
12		
13	+0.017	+0.017
15	+0.006	+0.006
16		
20	+0.020	+0.020
25	+0.007	+0.007

D	D公差	
	p6	m6
5	+0.020	+0.012
	+0.012	+0.004
7		
8	+0.024	+0.015
10	+0.015	+0.006
12		
15	+0.029	+0.018
18	+0.018	+0.007
22		
25	+0.035	+0.021
26	+0.022	+0.008
30		
35	+0.042	+0.025
	+0.026	+0.009

型号		③L选择	D	H	壁厚(N)	T	R
①代码	②d						
<p6> DAH DAHN DAHC	2	5 6 8 10 12	5	9	1.5	2.5	0.8
	3	5 6 8 10 12	7	11	2	2.5	0.8
	4	5 6 8 10 12 15 16 20	8	12	2	3	1
	5	5 6 8 10 12 15 16 20	10	14	2.5	3	1
	6	5 6 8 10 12 15 16 20 25	10	14	2	3	1
	8	5 6 8 10 12 15 16 20 25	12	16	2	4	2
	10	6 8 10 12 15 16 20 25	15	19	2.5	4	2
	12	8 10 12 15 16 20 25 30	18	22	3	4	2
	13	10 12 15 16 20 25 30	22	26	4.5	5	2
	15	12 15 16 20 25 30	25	30	5	5	2
	16	12 15 16 20 25 30	26	30	5	5	2
	20	12 15 16 20 25 30	30	35	5	6	3
	25	16 20 25 30 35	35	40	5	6	3



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达