



圆棒材/六角型材/树脂棒材

六角型材

材质S45C相当·SUS303/304 C3604·A2011



型号(1代码·2B) — (3L)
JBRC10 — 300



■ 请按步骤①~③选择型号和参数后进行订购。



型号区分:
■ 色型式 5 天发货



代码	材质
JBRC	S45C
JBRF	SUS303
JBRS	SUS304
JBRG	C3604(黄铜)
JBRA	A2011

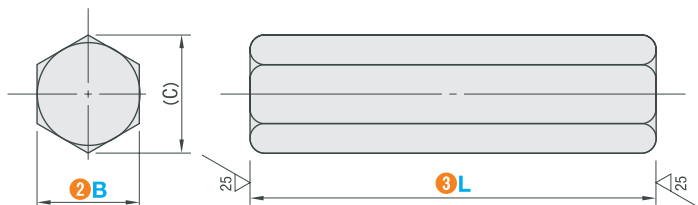

■ B尺寸公差

● 相当于S45C·SUS303·SUS304

B	公差
6~8	0 -0.15
10~17	0 -0.18
19~27	0 -0.21
30~32	0 -0.25

● A2011

B	公差
6~8	±0.10
10~17	±0.18
19~27	+0.12 -0.21
30~32	+0.12 -0.25

● C3604(黄铜)

B	公差
6	±0.06
7~8	±0.08
10~19	±0.06
24~32	±0.08



■ L尺寸公差

以上	以下	公差
15	30	±0.2
31	120	±0.3
121	400	±0.5
401	1000	±0.8

型号		3L 最小单位 1mm	(C)
1 代码	2 B		
JBRC (S45C) JBRF (SUS303) JBRS (SUS304) JBRG (黄铜) JBRA (A2011)	6	15~400	6.9
	7		8.1
	8		9.2
	10	25~600	11.5
	12		13.9
	13		15.0
	14	35~800	16.2
	17		19.6
	19		21.9
	24	65~800	27.7
	27		31.2
	30		34.6



型号(1代码·2B) — (3L) — (MC·WMC)
JBRC19 — 535 — MC8

	加工一端螺纹	加工两端螺纹																																
可选加工																																		
代码	MC	WMC																																
技术说明	在一端加工螺纹。 指定方法 MC8 ① $6 \leq B \leq 32$ ① $L \leq M \times 2$时变为螺纹通孔。 <table><thead><tr><th>B</th><th>MC(选择范围)</th></tr></thead><tbody><tr><td>6・7</td><td>3</td></tr><tr><td>8</td><td>3・4</td></tr><tr><td>10</td><td>3・4・5</td></tr><tr><td>12~14</td><td>3・4・5・6</td></tr><tr><td>17・19</td><td>3・4・5・6・8</td></tr><tr><td>24</td><td>3・4・5・6・8・10・12</td></tr><tr><td>27~30</td><td>3・4・5・6・8・10・12・16</td></tr></tbody></table> ① $L \leq M \times 4$时，螺纹底孔可能会贯通。	B	MC(选择范围)	6・7	3	8	3・4	10	3・4・5	12~14	3・4・5・6	17・19	3・4・5・6・8	24	3・4・5・6・8・10・12	27~30	3・4・5・6・8・10・12・16	在两端加工螺纹。 指定方法 WMC12 ① $6 \leq B \leq 32$ ① $L \leq M \times 4$时变为螺纹通孔。 <table><thead><tr><th>B</th><th>WMC(选择范围)</th></tr></thead><tbody><tr><td>6・7</td><td>3</td></tr><tr><td>8</td><td>3・4</td></tr><tr><td>10</td><td>3・4・5</td></tr><tr><td>12~14</td><td>3・4・5・6</td></tr><tr><td>17・19</td><td>3・4・5・6・8</td></tr><tr><td>24</td><td>3・4・5・6・8・10・12</td></tr><tr><td>27~30</td><td>3・4・5・6・8・10・12・16</td></tr></tbody></table>	B	WMC(选择范围)	6・7	3	8	3・4	10	3・4・5	12~14	3・4・5・6	17・19	3・4・5・6・8	24	3・4・5・6・8・10・12	27~30	3・4・5・6・8・10・12・16
B	MC(选择范围)																																	
6・7	3																																	
8	3・4																																	
10	3・4・5																																	
12~14	3・4・5・6																																	
17・19	3・4・5・6・8																																	
24	3・4・5・6・8・10・12																																	
27~30	3・4・5・6・8・10・12・16																																	
B	WMC(选择范围)																																	
6・7	3																																	
8	3・4																																	
10	3・4・5																																	
12~14	3・4・5・6																																	
17・19	3・4・5・6・8																																	
24	3・4・5・6・8・10・12																																	
27~30	3・4・5・6・8・10・12・16																																	

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613