


带座轴承 T型高度选择型

轴承、轴承座组件



代码	材质		表面处理	附件挡圈
高度h选择型	轴承	固定座	固定座	
BBHKB	钢	S45C	发黑	弹簧钢
BBHK			无电解镀镍	
BBCHKA	不锈钢	铝合金	本色阳极氧化处理	SUS304
BBHKSA				
BBHKS		SUS304	—	

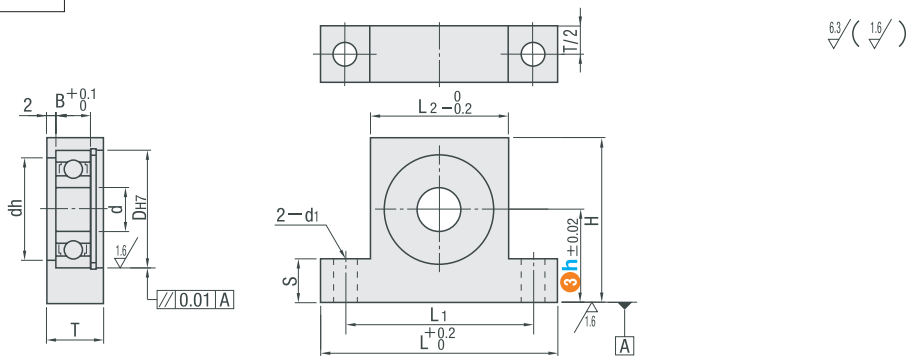

轴承精度 JIS B 1514 0级



型号(①代码·②轴承型号) — ③h
BBHK6000ZZ — 20

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④代码 7天发货

型号 ① 代码	② 轴承型号	高度 ③ h	d	H	L ₁	d ₁	L	L ₂	T	S	dh	D _{H7}	B	可订购型号				
														BBHKB	BBHK	BBCHKA	BBHKSA	BBHKS
BBHKB BBHK BBCHKA BBHKSA BBHKS	623ZZ	15 20 25	3	h+9	26	4.5	36	16	10	5	7	10	4	●	●	●	-	-
	624ZZ	15 20 25	4	h+11	28	4.5	38	18	10	5	9	13	5	●	●	●	-	-
	605ZZ	15 20 25	5	h+11	30	4.5	40	20	10	5	10	14	5	●	●	●	-	-
	625ZZ	20 25 30	5	h+12	34	4.5	46	22	10	10	12	16	5	●	●	●	-	-
	606ZZ	20 25 30	6	h+13	35	5.5	47	23	12	10	13	17	6	●	●	●	●	●
	626ZZ	20 25 30	6	h+14	37	5.5	49	25	12	10	15	19	6	●	●	●	●	●
	698ZZ	20 25 30	8	h+14	37	5.5	49	25	11	10	16	19	6	●	●	●	●	●
	608ZZ	20 25 30	8	h+15	41	5.5	53	29	12	10	18	22	7	●	●	●	●	●
	628ZZ	20 25 30	8	h+16	44	5.5	56	32	15	10	20	24	8	●	●	●	●	●
	6900ZZ	20 25 30	10	h+14	38	5.5	50	26	10	10	16	19	5	●	●	●	●	●
	6900ZZ	20 30 40	10	h+15	41	5.5	53	29	12	10	19	22	6	●	●	●	●	●
	6000ZZ	20 30 40	10	h+17	46	5.5	58	34	15	10	22	26	8	●	●	●	●	●
	6200ZZ	20 30 40	10	h+19	50	5.5	62	38	15	10	24	30	9	●	●	●	●	●
	6801ZZ	20 30 40	12	h+15	41	5.5	53	29	10	10	18	21	5	●	●	●	●	●
	6901ZZ	20 30 40	12	h+16	44	5.5	56	32	12	10	21	24	6	●	●	●	●	●
	6001ZZ	20 30 40	12	h+18	48	5.5	60	36	15	10	24	28	8	●	●	●	●	●
	6201ZZ	20 30 40	12	h+20	52	5.5	64	40	16	10	26	32	10	●	●	●	●	●
	6802ZZ	30 40 50	15	h+16	44	5.5	56	32	10	10	21	24	5	●	●	●	●	●
	6902ZZ	30 40 50	15	h+18	48	5.5	60	36	12	15	25	28	7	●	●	●	●	●
	6002ZZ	30 40 50	15	h+20	54	6.5	68	40	15	15	28	32	9	●	●	●	●	●
	6202ZZ	30 40 50	15	h+22	58	6.5	72	44	16	15	29	35	11	●	●	●	●	●
	6903ZZ	30 40 50	17	h+19	52	6.5	64	38	13	15	27	30	7	●	●	●	●	●
	6003ZZ	30 40 50	17	h+22	56	6.5	70	43	16	15	31	35	10	●	●	●	●	●
	6203ZZ	30 40 50	17	h+24	62	6.5	76	49	19	15	34	40	12	●	●	●	●	●
	6804ZZ	30 40 50	20	h+20	53.5	6.5	68	40	13	15	29	32	7	●	●	●	●	●
	6904ZZ	40 50 60	20	h+23	59	6.5	73	45	15	15	34	37	9	●	●	●	●	●
	6004ZZ	40 50 60	20	h+25	66	9	82	50	19	15	36	42	12	●	●	●	●	●
	6204ZZ	40 50 60	20	h+28	72	9	88	56	19	15	40	47	14	●	●	●	●	●
	6805ZZ	40 50 60	25	h+23	64	9	82	46	13	15	34	37	7	●	●	-	-	-
	6905ZZ	40 50 60	25	h+25	69	9	91	51	15	15	39	42	9	●	●	-	-	-
	6005ZZ	40 50 60	25	h+28	76	9	96	56	19	15	41	47	12	●	●	-	-	-
	6205ZZ	40 50 80	25	h+31	82	11	102	62	22	20	45	52	15	●	●	-	-	-
	6806ZZ	40 50 80	30	h+25	71	11	91	51	14	20	39	42	7	●	●	-	-	-
	6906ZZ	40 50 80	30	h+28	76	11	96	56	16	20	44	47	9	●	●	-	-	-
	6006ZZ	40 50 80	30	h+32	84	11	104	64	19	20	48	55	13	●	●	-	-	-
	6206ZZ	40 50 80	30	h+36	92	11	112	72	22	20	55	62	16	●	●	-	-	-
	6007ZZ	50 90	35	h+36	92	11	112	72	21	20	55	62	14	●	●	-	-	-
	6207ZZ	50 90	35	h+44	118	13	148	88	26	25	64	72	17	●	●	-	-	-
	6008ZZ	60 100	40	h+41	102	11	122	82	24	20	60	68	15	●	●	-	-	-
	6208ZZ	60 100	40	h+50	130	13	160	100	27	25	74	80	18	●	●	-	-	-



型号(①代码·②轴承型号) — ③h — (KKC·KCC·NA)
BBHK6000ZZ — 20 — NA

加工上端两侧倒角			
可选加工 代码	加工倒角C	加工倒角C2	无轴承型
	KKC	KCC	NA
技术说明	加工上端两侧倒角C(45°) 指定方法KKC		固定座中不组装轴承、挡圈，作为附件发货。
	d	KKC	
	3~ 8	5	
	10~20	10	
	25~40	12	
①仅6207ZZ、6208ZZ型号的轴承适用于KKC15。			



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达