



型号 (1) 代码 (2) D寸公差 (3) D — (4) L
DAGLSQTAG8 — L29.3

■ 请按步骤 1~4 选择型号和参数后进行订购。




型号区分: 7 天发货
代码



代码	材质	表面处理	硬度
DALSQTA	SKS3	—	淬火硬度60~63HRC
DAGLSQTA	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACLSQTA	SUS440C	—	淬火硬度50~55HRC
DASLSQTA	SUS304	—	—

$6.3 / (0.4 \sqrt{G})$

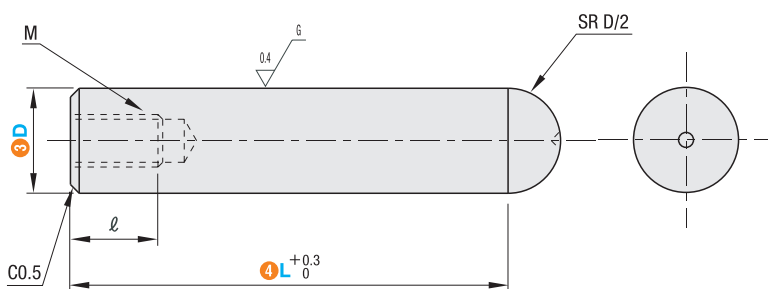

■ 公差选择

D	D尺寸公差			
	M	P	G	H
	m6	p6	g6	h7
5 · 6	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012
8 · 10	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015



■ 内螺纹底孔深度

螺纹直径	M2	M3	M5
底孔直径d2	1.8	2.6	4.3
底孔深度U	8	9.5	14.5

型号			M (粗牙螺纹)	ℓ
(1) 代码	(2) D公差	(3) D		
DALSQTA DAGLSQTA DACLSQTA DASLSQTA	M P G H	6	M3	5
		8	M5	8
		10	M5	8

