



气缸/相关配件

浮动接头 一体型 超短 法兰安装型



型号(①代码·②M—螺距)
FCJCR10 — 1.25









型号区分:
①代码 ②天发货



标准加工品

螺纹	代 码		材质	表面处理	表面硬度	弹簧材质
	圆型	简易型				
内螺纹	FCJCR	FCJCC	S45C	发黑	40~45HRC	弹簧钢
外螺纹	FCJMCR	FCJMCC				

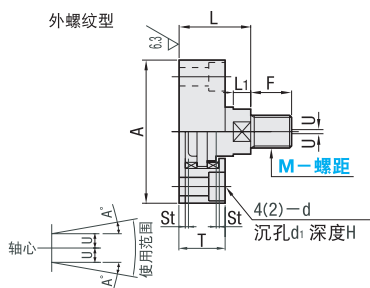

- ①请在螺纹孔深度范围内拧入螺栓。否则，将导致动作不良。
- ①单方向持续施加负载，可能会造成难以吸收偏心。

■浮动接头 一超短 法兰安装型—内螺纹(外螺纹气缸用)

型号		ℓ	W	L1	A	L	F	P.C.D.	d	d1	H	E	G	容许偏心量 U	容许偏角度 A°	St (参考值)	使用负载 kgf(N)	重量(g)	
①代码	②M—螺距																	圆型	简易型
圆型 FCJCR 简易型 FCJCC	5-0.8	12.5	7	4	44	16	10.5	32.1	6	9.5	5.5	23	32.1	0.5	4	0.65	~20(196.1)	106	69
	6-1.0															0.95	~80(784.5)	105	68
	8-1.25	16	10	5	50	20	13	36.6	7	11	6	26	36.6			1.1		166	109
	10-1.25	20	12	6	52	25	17	38.6				28	38.6			1.4	~440(4315)	236	157
	12-1.25													1.0				411	274
	14-1.5	23	17	7	66	28	19.5	49.6	9	14	8	36	49.6			1.5	~650(6374)	402	269
	16-1.5																	553	372
	18-1.5	30	22	9	70	35	24.5	53.6				40	53.6					538	363
	20-1.5																	1078	735
	22-1.5	38	27	10	88	45	31.5	68.1	12	18	10	51	68.1	1.5		1.9	~900(8826)	1058	715

■浮动接头 一超短 法兰安装型—外螺纹(内螺纹气缸用)

型号		F	W	L1	A	L	T	P.C.D.	d	d1	H	E	G	容许偏心量 U	容许偏角度 A°	St (参考值)	使用负载 kgf(N)	重量(g)	
①代码	②M—螺距																	圆型	简易型
圆型 FCJMCR 简易型 FCJMCC	5-0.8	10	7	4	44	16	10.5	32.1	6	9.5	5.5	23	32.1	0.5	4	0.65	~20(196.1)	103	67
	6-1.0															0.95	~80(784.5)	105	69
	8-1.25	15	10	5	50	20	13	36.6	7	11	6	26	36.6			1.1		173	113
	10-1.5	15	12	6	52	25	17	38.6				26	38.6			1.4	~440(4315)	246	163
	12-1.75	18	17	7	66	28	19.5	49.6	9	14	8	36	49.6	1.0				445	298
	16-2.0	20	22	9	70	35	24.5	53.6				40	53.6			1.5	~650(6374)	653	457
	20-2.5																	1304	928
		25	27	10	88	45	31.5	68.1	12	18	10	51	68.1	1.5		1.9	~900(8826)		

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613