



定位销/夹具衬套

定位销 大头球面型 DP公差选择



■ 请按步骤①~④选择型号和参数后进行订购。

型号(①代码·②D公差·③P公差·④D)

DAKQAMS6
DASKQDGS10

— ⑤P — ⑥L — ⑦B
— P8.00 — L8 — B6.0
— P14.00 — L15 — B10.0



型号区分:

代码

7 天发货

定位销
夹具衬套


20



代码		材质	表面处理	硬度
圆型	多棱型			
DAKQA	DAKQD	SKS3	—	淬火硬度60~63HRC
DAGKQA	—	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACKQA	DACKQD	SUS440C	—	淬火硬度50~55HRC
DASKQA	DASKQD	SUS304	—	—

■ 公差选择

D 或 P	②·③D·P公差				
	M m6	P p6	G g6	H h7	S —
1.00 ~ 3.00	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010	0 -0.01
3.01 ~ 6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	
6.01 ~ 10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01 ~ 18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01 ~ 30.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

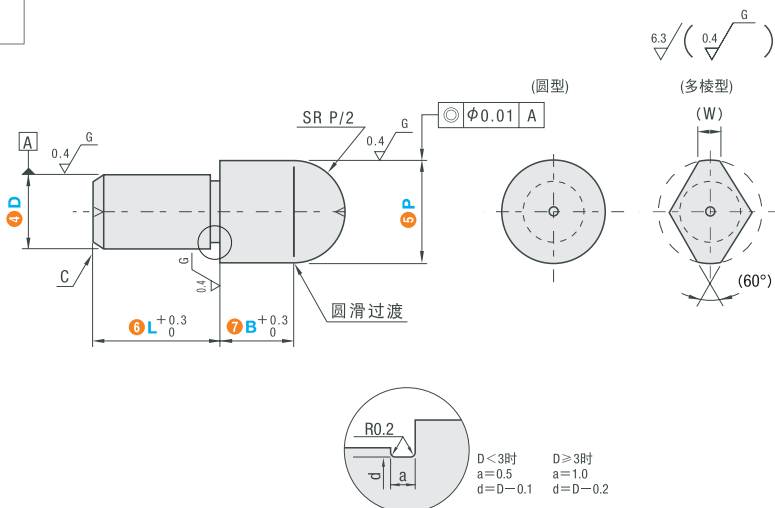

型号				⑤P 最小单位0.01mm	⑥L 最小单位1mm	⑦B 最小单位0.1mm	C	(W)
①代码	②D 公差选择	③P 公差选择	④D					
<圆型> DAKQA DAGKQA DACKQA DASKQA <多棱型> DAKQD DACKQD DASKQD	M P G H	S M P G H	1	1.00~3.00 (2.50)	2~3	2.0~5.0	0.1	—
			2	2.00~6.00 (4.00)	2~6	2.0~15.0 (10.0)	0.5	1.2
			3	3.00~8.00	3~10	2.0~15.0 (10.0)	0.5	1.5
			4	4.00~8.00	3 (4)~14	2.0~15.0 (10.0)	1	1.8
			5	5.00~10.00	5~15	2.0~15.0 (10.0)	1	2.2
			6	6.00~10.00	5~15	2.0~30.0 (15.0)	1	3
			8	8.50~15.00	5 (6)~16	2.0~30.0 (15.0)	1.5	3.5
			10	10.00~17.00	5 (10)~20	3.0~30.0 (25.0)	2	4
			12	12.00~18.00	6 (10)~24	3.0~30.0 (25.0)	2	5
			13	13.00~20.00	7 (12)~26	5.0~30.0 (25.0)	2	5.5
			16	16.00~27.00	8 (15)~32	5.0~30.0	3	7
			20	20.00~30.00	10 (15)~40	5.0~30.0	3	9

① P · L · B () 尺寸适用于多棱型。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613