

大头圆锥型

内螺纹型/P·L·B尺寸指定型

定位销



型号(①代码·②NO.) — ③P — ④L — ⑤B
DAFQSTA6 — P4.00 — L10 — B5.5

■请按步骤①~⑤选择型号和参数后进行订购。



型号区分: ④ 天发货




代码		材质	表面处理	硬度
圆型	多棱型			
DAFQSTA	DAFQSTD	SKS3	—	淬火硬度60~63HRC
DAGFQSTA	DAGFQSTD	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度 750HV~
DACFQSTA	DACFQSTD	SUS440C	—	淬火硬度50~55HRC
DASFQSTA	DASFQSTD	SUS304	—	—

■D尺寸公差

No.	D	g6
6	6	-0.004 -0.012
8·8T	8	-0.005 -0.014
10·10T	10	-0.006 -0.017
12·12T	12	-0.007 -0.020
13·13T	13	-0.007 -0.020
16·16T	16	-0.007 -0.020
20·20T	20	-0.007 -0.020

■内螺纹底孔表

螺纹直径	M3	M4	M5	M6	M8
底孔直径d ₂	2.6	3.4	4.3	5.1	6.9
底孔深度U	9.5	12	14.5	17	21

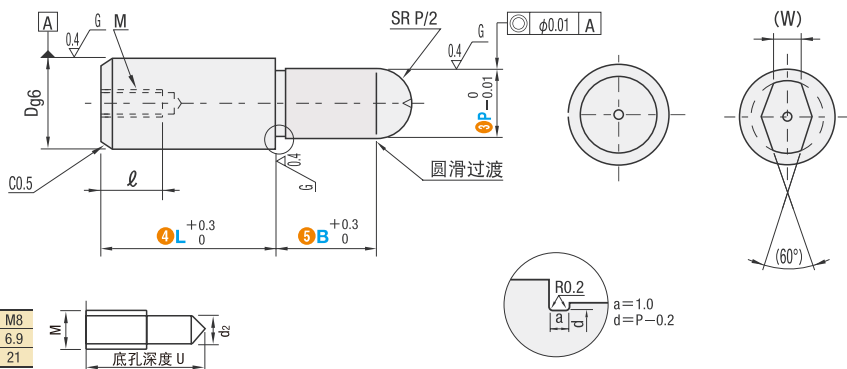

型号		③P 最小单位0.01mm	④L 最小单位1mm		⑤B 最小单位0.1mm	D	M (粗牙螺纹)	ℓ	(W)
①代码	②No.		圆型	多棱型					
<圆型> DAFQSTA DAGFQSTA DASFQSTA DACFQSTA	6	4.00~6.00	8~17	9~17	2.0~15.0	6	M3	5	1.5
	8	6.00~8.00	11~21	12~21	2.0~30.0 (15.0)	8	M5	8	1.8
	8T					8	M4	6	1.8
	10	7.00~10.00	11~23	12~23	3.0~30.0 (25.0)	10	M5	8	2.2
	10T		8~23	12~23		10	M4	6	2.2
	12	7.00~12.00	12~24	12~24	3.0~30.0 (25.0)	12	M5	8	2.5
	12T		8~18	12~18		12	M4	6	2.5
	13	8.00~13.00	13~26	14~26	5.0~30.0 (25.0)	13	M8	10	3
	13T		10~20	14~20		13	M6	9	3
	16	10.00~16.00	16~32	16~32	5.0~30.0	16	M8	12	4
	16T		10~24	14~24		16	M6	9	4
	20	13.00~20.00	20~40	20~40	5.0~30.0	20	M8	12	5
	20T		12~30	18~30		20	M6	9	5

① B()尺寸适用于多棱型。

定位销
夹具衬套

20



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达