



型号(①代码·②d)
ADHGS20

■ 请按步骤①~②选择型号和参数后进行订购。





型号区分:
代码 7 天发货

■ 单衬型





单衬型

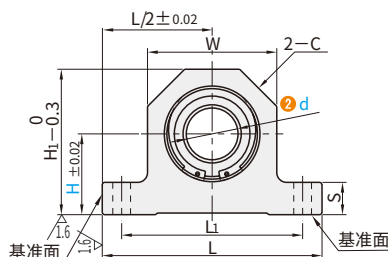

■ 双衬型



双衬型

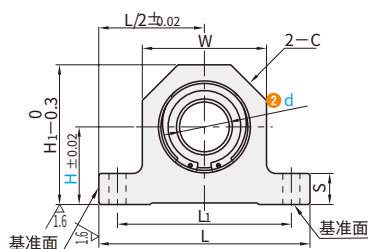

型号		H			L	H ₁	T		T ₁		S	W	C	L ₁	d ₁
① 代码	② d	选择					单衬型	双衬型	单衬型	双衬型					
ADHGS	12	15	20	25	58	H+15	40	70	25	50	8	30	8.5	46	5.5
	16	20	25	30	68	H+20	47	84	30	55	10	40	11.5	56	5.5
	20	20	25	30	72	H+22	52	94	35	60	12	44	12.5	60	5.5
ADHGL	25	25	30	40	90	H+27.5	69	128	50	90	15	55	16	75	6.6
	30	30	40	50	105	H+32.5	74	138	55	100	20	65	18	85	9

① ADHGL没有ADHGL12-25,16-25,30-40规格。

② d	基本额定负载				静态容许力矩		重量(g)	
	C(动) N		Co(静)N		(N·m)		单衬型	双衬型
	单衬型	双衬型	单衬型	双衬型	单衬型	双衬型		
12	412	657	598	1200	-	10.9	41	80
16	775	1230	1180	2350	-	19.7	73	145
20	882	1400	1370	2740	-	26.8	98	180
25	980	1560	1570	3140	-	43.4	236	440
30	1570	2490	2740	5490	-	82.8	262	480

国际单位1N=0.102kgf



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达