



型号(①代码·②D) - ③L - ④P - ⑤B
DADMCH8 - L20 - P4 - B2

■ 请按步骤①~⑤选择型号和参数后进行订购。




型号区分: ⑥ 代码 ⑦ 天发货

外螺纹型		材质	硬度	表面处理
圆型	多棱型			
DADMCH	DADRCH	S45C	—	发黑
DADQCRL	DADRCRL		镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
DADQCRH	DADRCRH		淬火硬度43~48HRC	发黑
DADWCRL	DADTCRL		淬火硬度43~48HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
DADWS	DADTS	SUS304	—	—
DADWSSR	DADTSSR	SUS440C	淬火硬度53~58HRC	—




外螺纹型圆型

DADMCH
DADQCRL
DADQCRH
DADWCRL
DADWS
DADWSSR

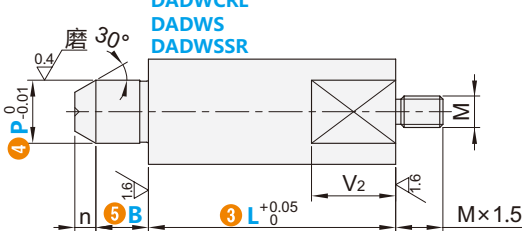

外螺纹型多棱型

DADRCH
DADRCRL
DADRCRH
DADTCRL
DADTS
DADTSSR

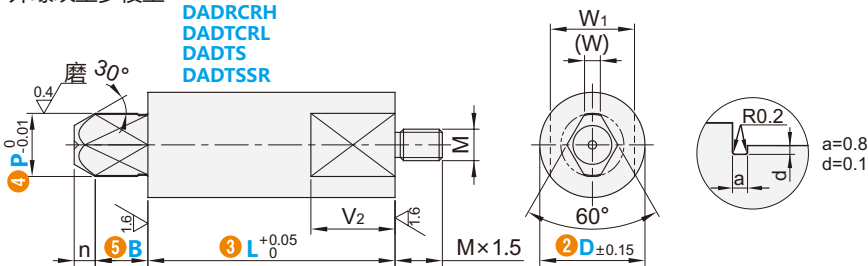

型号		最小单位0.01		⑤B	n	d	M	V1	W1	(W)	V2
①代码	②D	③L	④P								
圆型	多棱型	6	3.00~4.00	2	1.5	—	M3	—	5	1.0	8.5
DADMCH	DADRCH	8	3.00~6.00						7	1.5	
DADQCRL	DADRCRL	10	4.00~8.00	3	2.5	6	M5	6	8	1.5	10.5
DADQCRH	DADRCRH	12							10	1.8	
DADWCRL	DADTCRL	15	4.00~10.00	4	3.5	9	M8	9	13	2.2	
DADWS	DADTS	20	5.00~10.00						17	2.5	
DADWSSR	DADTSSR	25	8.00~15.00	5	16	M10	10	20	3		

① D10以下规格不适用于引导型。

