



型号(1)代码·(2)NO. — (3)L
CCGRS30 — 30

■请按步骤①~③选择型号和参数后进行订购。




型号区分: 代码 7 天发货

■纵向型滚轮



	材质			表面处理
	本体	芯轴	挡圈	
CCGRB	S45C	S45C	弹簧钢	钢
CCGRS	SUS304	SUS304	不锈钢	钢
CCGRA	铝合金	S45C	弹簧钢	钢

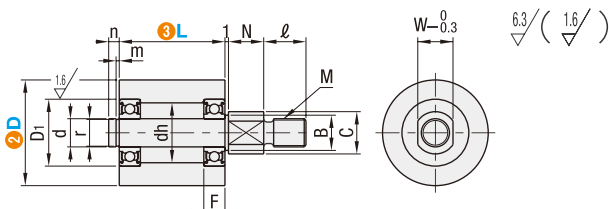

型号	(1)代码	(2)D	(3)L选择	N	d	ℓ	C	B	r	n	m	dh	D1	F	M (粗牙螺纹)	W	使用轴承
CCGRB (S45C)	20	20	25 30 40 50	10	6	9	10	8	5	2	0.7	10	15	5	6	8	696ZZ
CCGRS (SUS304)	25	20	25 30 40 50		8	12	12	10	7	3	0.9	15	19	6	8	10	698ZZ
CCGRA (铝合金)	30	20	25 30 40 50		10	15	15	13	9.6		1.15	18	22	8	10	13	6900ZZ
	40	20	25 30 40 50		12	18	18	14	11.5			24	28	10	12	14	6001ZZ
	50	25	30 40 50									24	32				6201ZZ



型号(1)代码·(2)D — (3)L — (NC)
CCGRB25 — 30 — NC15

可选加工	代码	技术说明
变更N尺寸 NC	NC	指定方法NC15 NC=指定单位1mm ① 5 ≤ NC ≤ 30 ② N以外的尺寸不变。



型号(1)代码·(2)D — (3)L
CCTBG16 — 5

■请按步骤①~③选择型号和参数后进行订购。



型号区分: 代码 7 天发货


■外螺纹型轴承



代码		材质		表面处理
标准外螺纹型	加长外螺纹型	轴承	轴	轴
CCTBG	CCTBGT	钢	S45C	无电解镀锌
CCTSBG	CCTSBGT	不锈钢	SUS303	—

■特长: 已安装螺栓, 无需防脱落零件。

① 螺纹根部带有不完整螺纹部。



型号		L		B	d	a	G	M (粗牙螺纹)	轴承	有无规格		
① 代码	② D	标准外螺纹型	加长外螺纹型							CCTBG · CCTBGT	CCTSBG · CCTSBGT	
标准外螺纹型 CCTBG CCTSBG 加长外螺纹型 CCTBGT CCTSBGT	13	5	8	5	4	1	1.5	M4	624ZZ	●		●
	16	5	8	5	5		2.5		625ZZ	●		●
	19	8	12	6	6		626ZZ		●		●	
	22	8	12	7	8		4		608ZZ	●		●
	26	8	12	8	10	2.5	5	M6	6000ZZ	●		●
	30	8	12	9	10	2	5		6200ZZ	●		●
	32	12	20	9	15	2.5	5		6002ZZ	●		●
	35	12	20	11	15	3	5		6202ZZ	●		●
	37	12	20	9	20	2.5	8	M10	6904ZZ	●		●
	47	12	20	14	20	3	8		6204ZZ	●		—
	52	12	20	15	25	3	10		6205ZZ	●		—



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达