



型号(①代码·②M) — ③L
DBJST8 — 25

■请按步骤①~③选择型号和参数后进行订购。




型号区分: ⑦天发货
代码


■调整螺栓



代码				材质		表面处理
标准型		T尺寸简易型		国标	相当	
粗牙螺纹	细牙螺纹	粗牙螺纹	细牙螺纹			发黑
DBJST	DBJSTF	DBEFCH	DBEJCH	45	S45C	无电解镀锌
DBJSTM	DBJSTMF	DBEGCN	DBEKN			—
DBJSTS	DBJSTFS	DBEHS	DBELS	0Cr18Ni9	SUS304	—

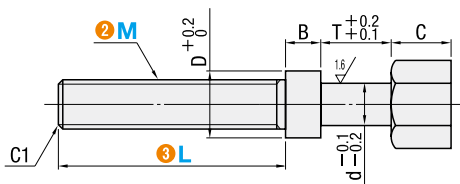

2.5 / (1.6)



型号		③L	d	T		M×螺距		B	D	C	E
①代码	②M			标准型	T尺寸简易型	粗牙螺纹	细牙螺纹				
标准型	T尺寸简易型	最小单位5	2.5	—	—	3×0.5	—	3	4.5	5	6
DBJST	DBEFCH	3 10~50	3.5	7	3	4×0.7	4×0.5	—	5.5	—	7
DBJSTM	DBEGCN	4 10~65	4.5	—	—	5×0.8	5×0.5	4.6	7.5	10	8
DBJSTS	DBEHS	5 10~75	5.5	9	5	6×1.0	6×0.75	—	8.5	—	10
DBJSTF	DBEJCH	6 15~85	7.5	12	—	8×1.25	8×0.75	6	11.5	15	13
DBJSTMF	DBEKN	8 20~110	9.5	16	—	10×1.5	10×1.0	7	15.5	—	17
DBJSTFS	DBELS	10 25~110	11.5	—	—	12×1.75	12×1.0	—	17.5	20	19
—	—	12 25~160	15.5	19	—	16×2.0	—	8	21.5	—	24
—	—	16	—	—	—	—	—	—	—	—	—



型号(①代码·②D) — ③L
DBJP3 — 20

■请按步骤①~③选择型号和参数后进行订购。



型号区分: ⑦天发货
代码



■调整销



代码	材质	附件
DBJP	SUS304	E型挡圈(SUS304)
DBJPB		—

DBJP (挡圈型)

DBJPB (螺帽固定型)

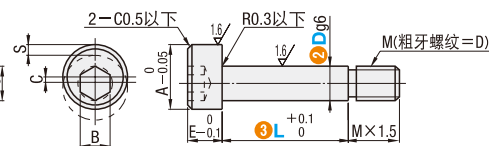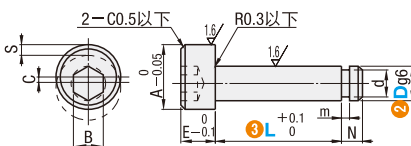

2.5 / (1.6)

型号		③L	A	B	E	C	S	m公差	N	d公差
①代码	②Dg6	最小单位 1mm								
DBJP DBJPB (L ≥ 10)	3	-0.002 -0.008	5.5	2.5	3.5	0.5	1	0.5	2	+0.06 0
	4	—	7	3	4.5	0.7	1.4	—	3	—
	5	-0.004 -0.012	8.5	4	5.5	1	2	0.7	4	+0.075 0
	6	—	10	5	6.5	1.3	2.6	—	5	—
—	8	-0.005 -0.014	13	6	8.5	1.6	3.2	0.9	7	+0.09 0

① DBJPB 为 L ≥ 10。② S 尺寸为通过内六角扳手使调整销 360° 旋转时的最大振幅。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达