



定位销



大头锥角型

锥角指定・DP公差选择



■请按步骤①~④选择型号和参数后进行订购。

型号(①代码) ②D公差 ③P公差 ④D) — ⑤P — ⑥L — ⑦B — ⑧E — ⑨A°
DAKAMS6 — P10.00 — L6 — B3.0 — E5.0 — A30
DASKDGS10 — B14.00 — L15 — B5.0 — E5.0 — A45



型号区分:

代码

7


天发货




代码		材质	表面处理	硬度
圆型	多棱型			
DAKA	DAKD	SKS3	—	淬火硬度60~63HRC
DAGKA	DAGKD	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACKA	DACKD	SUS440C	—	淬火硬度50~55HRC
DASKA	DASKD	SUS304	—	—
DABASL	DABBSL		镀硬铬 厚度5~8μm以上	镀层硬度850HV~

■公差选择


D 或 P	②・③D・P公差				
	M	P	G	H	S
	m6	p6	g6	h7	—
1.00~3.00	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010	0 -0.01
3.01~6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	
6.01~10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01~18.00	+0.018 +0.007	+0.029 +0.018	-0.006 -0.017	0 -0.018	
18.01~30.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

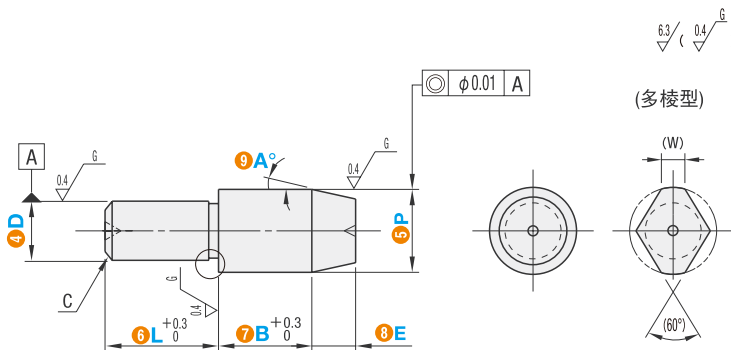

(i)D=P但公差不同时




(ii)D=P但公差相同时



(L+B)为一般公差。

(2)多棱型带退刀槽。



D<3时
a=0.5
d=D-0.1

D≥3时
a=1.0
d=D-0.2

型号				⑤P	⑥L	⑦B	⑧E	⑨A°	C	(W)
①代码	②D公差选择	③P公差选择	④D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位1mm	选择		
<圆型>	<多棱型>	M P G H	1	1.00~3.00 (1.50~2.50)	2・3	1.5~5.0	0.5~15.0	15 30 45 60	0.1	0.6
			2	2.00~6.00 (4.00)	2~6	1.5~15.0 (10.0)			0.5	1.2
			3	3.00~8.00	3~10	1.5~15.0 (10.0)			1	1.5
			4	4.00~8.00	3 (4)~14	1.5~15.0 (10.0)			1.5	1.8
			5	5.00~10.00	5~15	1.5~15.0 (10.0)			2	2.2
			6	6.00~10.00	5~15	1.5~30.0 (15.0)			3	3
			8	8.00~15.00	5 (6)~16	1.5~30.0 (15.0)			1.5	3.5
			10	10.00~17.00	5 (10)~20	3.0~30.0 (25.0)			4	4
			12	12.00~18.00	6 (10)~24	3.0~30.0 (25.0)			5	5.5
			13	13.00~20.00	7 (12)~26	5.0~30.0 (25.0)			7	7
			16	16.00~27.00	8 (15)~32	5.0~30.0			3	7
			20	20.00~30.00	10 (15)~40	5.0~30.0			9	9

①P・L・B ()尺寸适用于多棱型。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613