






■ 止动螺丝固定型



D公差 (g6)	
3	-0.002 -0.008
4~6	-0.004 -0.012
8·10	-0.005 -0.014
12~16	-0.006 -0.017
20·25	-0.007 -0.020

代码	材质	硬度	表面处理
BDLSG	S45C	—	发黑
BDLSGH		40~45HRC	
BDPLSG		—	无电解镀锌
BDPLSGH		40~45HRC	
BDBJCL		—	镀硬铬 镀层硬度850HV~
BDSLSG	SUS304	—	—
BDSLSGH	SUS440C	45~50HRC	
BDBKSS		48~53HRC	

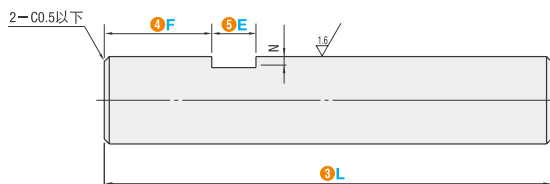

型号(1代码·2D) — (3L) — (4F) — (5E)
BDLSGH15 — 100 — F20 — E10

■ 请按步骤①~⑤选择
型号和参数后进行订购。



型号区分: 7 天发货

型 号		③L 最小单位 0.1mm	最小单位 1mm		N
① 代码	②D		④F	⑤E	
BDLSG BDLSGH BDPLSG BDPLSGH BDBJCL BDSLSG BDSLSGH BDBKSS	3	5.0~ 50.0	F=0 或 2≤F≤L/2	1≤E≤50	0.5
	4				
	5	10.0~ 60.0			1
	6	10.0~100.0			
	8				
	10	15.0~150.0			
	12	25.0~150.0			
	15	30.0~150.0			
	16				
	20				
	25				

