



# 弹簧/氮气弹簧

## 拉伸弹簧用支柱

缺口孔型 · 内六角孔型 · 六角型



型号 (1 代码 · 2 D/M/B) — (3 L)  
**LBAIOK8** — 40  
**LBARO6** — 20

■ 请按步骤 1~3 选择型号和参数后进行订购。





型号区分: **5** 天发货  
 代码

### ■ 缺口孔型



■ 使用时可将拉伸弹簧的挂钩勾在支柱的孔或槽中。

**LBAIOK**  
**LBSAIOK** (不锈钢)

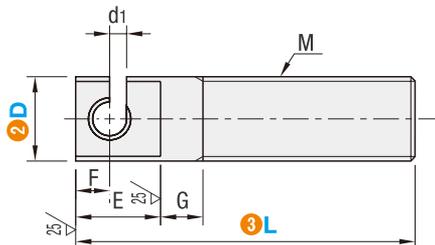

代码	材质	表面处理	附件·材质
<b>LBAIOK</b>	S45C	发黑	1个螺帽 SWCH(JIS3种)
<b>LBSAIOK</b>	SUS304	—	1个螺帽 SUS304(JIS1种)

∠(25/)


型号		3 L					M	d	d1	W	G	E	F	h	使用最大负载N	
1 代码	2 D	15	20	25	30	40	(粗牙螺纹)								LBAIOK	LBSAIOK
缺口孔型 <b>LBAIOK</b> <b>LBSAIOK</b>	4	15	20	25	30		M4	1.5		2.5	5	3.5	1.75	0.3	80	50
	5	15	20	25	30	40	M5	2	1	3		4	2	0.4	115	72
	6		20	25	30	40	M6			3.5		5	2.5	0.5	179	113
	8		25	30	40		M8	3	1.5	5		7	3.5	1	300	189

kgf=N×0.101972

### ■ 内六角孔型



**LBARO**  
**LBSARO** (不锈钢)

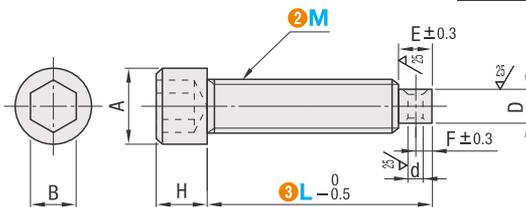

代码	材质	表面处理	附件·材质
<b>LBARO</b>	SCM435	发黑	1个螺帽 SWCH(JIS3种)
<b>LBSARO</b>	SUS304	—	1个螺帽 SUS304(JIS3种)


∠(25/)

型号		3 L					d	D	E	F	A	B	H	
1 代码	2 M	15	20	25	30	35	40							
内六角孔型 <b>LBARO</b> <b>LBSARO</b>	4	15	20	25	30			1.5	3.0	3	1.5	7	3	4
	5	15	20	25	30	35	40	2	3.8	4	2	8.5	4	5
	6		20	25	30	35	40		4.5			10	5	6
	8		20	25	30	35	40	3	6.1	7	3.5	13	6	8

### ■ 六角型



**LBDSO**  
**LBPDSO**

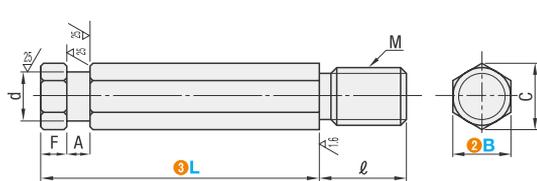

代码	材质	表面处理
<b>LBDSO</b>	SUM22	发黑
<b>LBPDSO</b>		无电解镀锌

∠(25/16/)

型号		3 L			M	(C)	ℓ	A	F	d
1 代码	2 B	10	15	20	(粗牙螺纹)					
六角型 <b>LBDSO</b> <b>LBPDSO</b>	3	10	15		M3	3.5	6	1	3	1.8
	4	10	15	20	M4	4.6	8	1.2		2
	5	10	15	20	M5	5.8	10	2		3
	6		20	25	M6	6.9	12		4	3.6
	8		20	25	30	M8	9.2	16	3	

询价4种方式



官网 <http://www.srdfaa.com>  
 深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863  
 客服热线 0755-27926613



型号(1代码·2D) — 3L  
LBBSO8 — 40

■请按步骤①~③选择型号和参数后进行订购。



型号区分: 5天发货  
代码

### ■槽型


■使用时可将拉伸弹簧的挂钩勾在支柱的孔或槽中。

代码	材质	表面处理	附件材质
LBBSO LBBSOZ	S45C	发黑	1个螺帽(JIS1种) SW1CH
LBBSOZ LBSBSOZ	SUS303	-	1个螺帽(JIS1种) SUS304


√(25/)



ℓ尺寸固定型  
**LBBSO**  
**LBSBSO**  
(不锈钢)

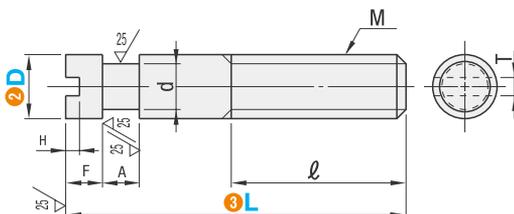

颈部全螺纹型  
**LBBSOZ**  
**LBSBSOZ**  
(不锈钢)

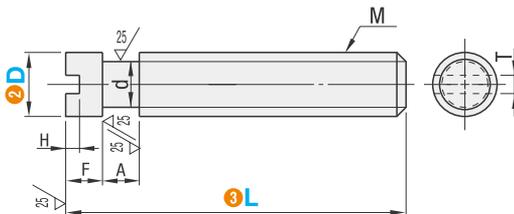

型号		3L	M (粗牙螺纹)	ℓ*	A	F	H	T	d
1 代码	2 D								
ℓ尺寸固定型 LBBSO LBSBSO	3	15 20 25 30	M3	10	1	3	1	1.2	1.8
	4	15 20 25 30 35	M4		1.2				2
	5	*15 20 25 30 35 40	M5	2	3				
	6	*20 25 30 35 40	M6	16	4	2	3.6		
	8	*20 *25 30 35 40	M8	20	3	2.5	5		

①关于规格表带\*符号的尺寸, ℓ尺寸为右表的尺寸。

型号		3L	M (粗牙螺纹)	A	F	H	T	d
1 代码	2 D							
颈部全螺纹型 LBBSOZ LBSBSOZ	3	10 15 20 25	M3	1	3	1	1.2	1.8
	4	10 15 20 25 30	M4	1.2				2
	5	15 20 25 30 35	M5	2	3			
	6	20 25 30 35	M6	3	4	2		3.6
	8	25 30 35	M8		2.5	5		



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

**SRO** 仕瑞达