



型号(①代码·②S) - ③L - ④M - ⑤N - ⑥G - ⑦H

HDAQTH - 20 - M3 - N4 - G4 - H3

■请按步骤①~⑦选择型号和参数后进行订购。



型号区分: 代码 **7** 天发货





L	公差
20~300	±0.2
300.5~620	±0.3
620.5~1020	±0.4

一端外螺纹一端内螺纹型	台阶指定型	材质	表面处理
标准型	台阶指定型	SS400	—
HDALT	HDAQT		发黑
HDALTH	HDAQTH		无电解镀锌
HDALTN	HDAQTN		—
HDALS	HDAQS	SUS304	—

标准型 HDALT / HDALTH / HDALTN / HDALS

台阶指定型 HDAQT / HDAQTH / HDAQTN / HDAQS

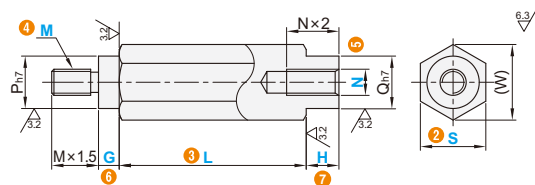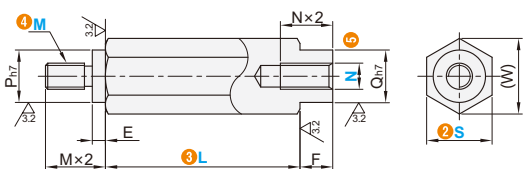

① Q235材质的产品出货时带有防锈油。

■ 标准型

型号	最小单位0.5	④M·⑤N		E	F	P	Q	(W)
① 代码	② S	③ L						
HDALT HDALTH HDALTN HDALS	8	20.0~260.0	3 4	2	4	6	6	9.2
	10	20.0~360.0	4 5		5	8	8	11.5
	12	25.0~420.0	5 6	3	6	10	10	13.9
	13		5 6					15
	14	30.0~520.0	6 8	4	8	12	12	16.2
	17		6 8					19.6
	19		6 8 10 12	5	10	16	16	21.9
	24	55.0~620.0	6 8 10 12 16	6	12	20	20	27.7
	27	55.0~820.0	6 8 10 12 16	7	16	24	24	31.2
	27A					20	20	
	30					28	28	
	30A					24	24	34.6
32	30					30		
32A	24					24		
	70.0~1020.0	6 8 10 12 16 20 24	8	20	30	30	36.9	

■ 台阶指定型

型号	最小单位0.5	④M·⑤N		最小单位1		P	Q	(W)
① 代码	② S	③ L		⑥ G	⑦ H			
HDAQT HDAQTH HDAQTN HDAQS	8	20.0~260.0	3 4	2~4	2~4	6	6	9.2
	10	20.0~360.0	4 5	2~5	2~5	8	8	11.5
	12	25.0~420.0	5 6	2~6	2~6	10	10	13.9
	13		5 6					15
	14	30.0~520.0	6 8	2~8	2~8	12	12	16.2
	17		6 8					19.6
	19		6 8 10 12	2~10	2~10	16	16	21.9
	24	55.0~620.0	6 8 10 12 16	2~12	2~12	20	20	27.7
	27	55.0~820.0	6 8 10 12 16	2~16	2~16	24	24	31.2
	27A					20	20	
	30					28	28	
	30A					24	24	34.6
32	30					30		
32A	24					24		
	70.0~1020.0	6 8 10 12 16 20 24	2~20	2~20	30	30	36.9	



型号(①代码·②S) - ③L - ④M - ⑤N - ⑥G - ⑦H - LKC...etc)

HDAQTH - 20 - M3 - N4 - G4 - H3 - LKC

代码	技术说明																								
LKC	<p>变更L尺寸公差</p> <p>选型方法 LKC</p> <p>① L尺寸公差变更</p> <p>L20~300 变更为: ±0.05</p> <p>L300.5~620 变更为: ±0.10</p> <p>L620.5~1020 变更为: ±0.15</p>																								
PKH VKH	<p>变更台阶部直径</p> <p>选型方法 PKH-VKH</p> <p>① 最小单位1</p> <p>② 仅适用右表D尺寸范围</p> <table border="1"> <thead> <tr> <th>S</th> <th>PKH-VKH</th> </tr> </thead> <tbody> <tr><td>5</td><td>7-8</td></tr> <tr><td>10</td><td>8-10</td></tr> <tr><td>12</td><td>8-10</td></tr> <tr><td>13</td><td>8-10</td></tr> <tr><td>14</td><td>10-12</td></tr> <tr><td>17</td><td>10-12</td></tr> <tr><td>19</td><td>14-17</td></tr> <tr><td>24</td><td>19-22</td></tr> <tr><td>27</td><td>19-25</td></tr> <tr><td>30</td><td>26-28</td></tr> <tr><td>32</td><td>26-30</td></tr> </tbody> </table>	S	PKH-VKH	5	7-8	10	8-10	12	8-10	13	8-10	14	10-12	17	10-12	19	14-17	24	19-22	27	19-25	30	26-28	32	26-30
S	PKH-VKH																								
5	7-8																								
10	8-10																								
12	8-10																								
13	8-10																								
14	10-12																								
17	10-12																								
19	14-17																								
24	19-22																								
27	19-25																								
30	26-28																								
32	26-30																								

代码	技术说明
PC	<p>M侧台阶部取消</p> <p>选型方法 PC</p> <p>① 台阶部、扳手槽指定型时,请指定G2(可选加工指定G2时,表示G台阶实际尺寸为0)。</p> <p>② 仅适用台阶指定型。</p>
QC	<p>N侧的台阶部取消</p> <p>选型方法 QC</p> <p>① 台阶部、扳手槽指定型时,请指定H2(可选加工指定H2时,表示H台阶实际尺寸为0)。</p> <p>② 仅适用台阶指定型。</p>

