

进给销 ▶ 直杆型（外螺纹型）

定位销



型号(①代码·②D) — ③P — ④L — ⑤B — ⑥E
DAFPS6 — P6.50 — L10 — B8.0 — E2.0
DAFPST10 — P10.50 — L8 — B6.0 — E2.0

■请按步骤①~③选择
型号和参数后进行订购。




型号区分：
代码 7 天发货

■ 圆型



代码	材质	表面处理	硬度
DAFPS	SKS3	—	淬火硬度60~63HRC
DALDWR	SKD11	镀硬铬 厚度3~5μm	淬火硬度60~63HRC
DASFPS	SUS304	—	—
DALDSL	SUS304	镀硬铬 厚度5~8μm	镀层硬度850HV~
DACFPS	SUS440C	—	淬火硬度50~55HRC

D	D公差 g6
3	-0.002 -0.008
4	-0.004 -0.012
5	-0.004 -0.012
6	-0.005 -0.014
8	-0.005 -0.014
10	-0.005 -0.014

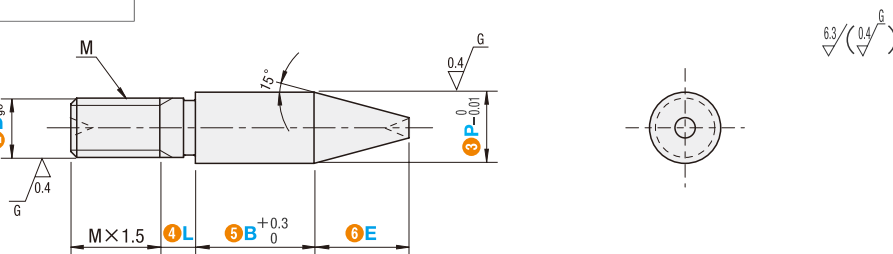


型号		③P 最小单位0.01mm	④L 最小单位1mm	⑤B 最小单位0.1mm	⑥E 最小单位0.1mm	M
①代码	②D					
DAFPS	3	3.50~ 6.00	0~12	2.0~10.0	0.5~10.0	M3
DALDWR	4	4.50~ 7.00	0~12	2.0~10.0	0.5~10.0	M4
DASFPS	5	5.50~ 8.00	0~12	2.0~10.0	0.5~10.0	M5
DALDSL	6	6.50~10.00	0~12	2.0~12.0	0.5~10.0	M6
DACFPS	8	9.00~13.00	0~12	2.0~15.0	0.5~10.0	M8
	10	10.00~13.00	0~12	2.0~20.0	0.5~10.0	M10

■ 三角型



代码	材质	表面处理	硬度
DAFPST	SKS3	—	淬火硬度60~63HRC
DALCWR	SKD11	镀硬铬 厚度3~5μm	淬火硬度60~63HRC
DACFPST	SUS304	—	—
DALESL	SUS304	镀硬铬 厚度5~8μm	镀层硬度850HV~
DASFPST	SUS440C	—	淬火硬度50~55HRC

D	D公差 g6
3	-0.002 -0.008
4	-0.004 -0.012
5	-0.004 -0.012
6	-0.005 -0.014
8	-0.005 -0.014
10	-0.005 -0.014

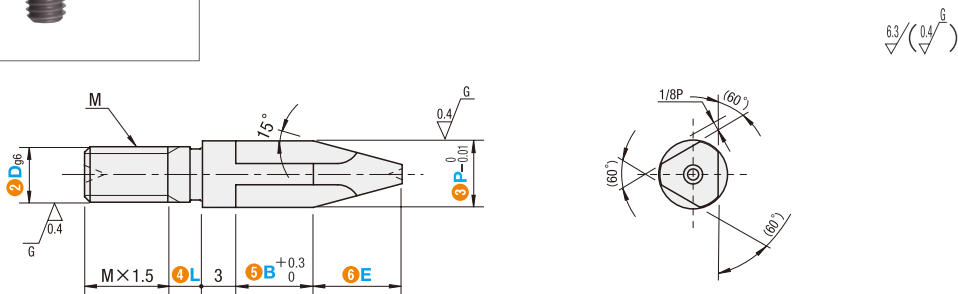

型号		③P 最小单位0.01mm	④L 最小单位1mm	⑤B 最小单位0.1mm	⑥E 最小单位0.1mm	M
①代码	②D					
DAFPST	3	3.50~ 6.00	0~12	2.0~10.0	0.5~10.0	M3
DALCWR	4	4.50~ 7.00	0~12	2.0~10.0	0.5~10.0	M4
DACFPST	5	5.50~ 8.00	0~12	2.0~10.0	0.5~10.0	M5
DALESL	6	6.50~10.00	0~12	2.0~12.0	0.5~10.0	M6
DASFPST	8	9.00~13.00	0~12	2.0~15.0	0.5~10.0	M8
	10	10.00~13.00	0~12	2.0~20.0	0.5~10.0	M10



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达