



型号(1代码·2D<sub>H8</sub>) — (3L) — 20  
**DALH12**

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: **7** 天发货  
 代码

■带肩型



代码	材质	硬度	表面处理
<b>DALH</b>	SUJ2	淬火硬度58HRC~	—
<b>DADVJ</b>		淬火硬度56HRC~; 镀层硬度850HV~	镀硬铬, 镀层厚度3-5μm


DALH(标准型)

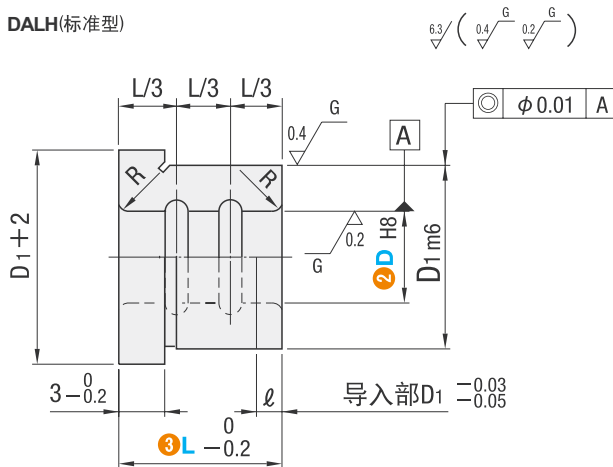

D <sub>H8</sub>	D <sub>H8</sub> 公差 H8
5	+0.018 0
6	0
8	+0.022 0
10	0
12	0
13	+0.027 0
15	0
16	0
20	+0.033 0
25	0

D <sub>1m6</sub>	D <sub>1m6</sub> 公差 m6
10	+0.015 +0.006
12	0
14	+0.018
16	+0.007
18	0
22	0
25	+0.021 +0.008
26	0
30	0
35	+0.025 +0.009

DADVJ

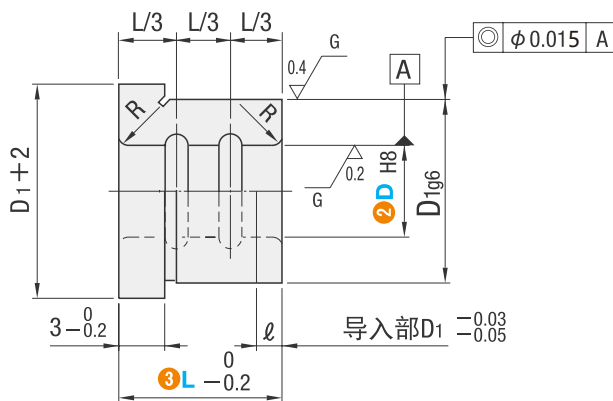

D <sub>1g6</sub>	D <sub>1g6</sub> 公差 g6
10	-0.005 -0.014
12	0
14	-0.006
16	-0.017
18	0
22	0
25	-0.007 -0.020
26	0
30	0
35	-0.009 -0.025

1 代码	型号		3 L选择				D <sub>1</sub>	ℓ	R	
	2 D <sub>H8</sub>		8	10	12	16				
<b>DALH</b> <b>DADVJ</b>	5	+0.018 0	8	10	12	16	10	1.5	0.5	
	6		8	10	12	16	12	2		
	8		8	10	12	16	14	3		1
	10	8	10	12	16	16				
	12	10	12	16	20	18	4		1.2	
	13	10	12	16	20	22				
	15	+0.027 0	16	20	25	30	25	4	1.5	
	16		16	20	25	30	26			
	20	+0.033 0	16	20	25	30	30			2
	25		20	25	30	35	35			



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

**SRD 仕瑞达**