



型号(①代码·②规格)
FBCP003

■请按步骤①~②选择型号和参数后进行订购。




型号区分:
代码 5 天发货

■VA型



代码	类型	材质	硬度 (肖氏)	颜色	使用 温度范围	使用 压力范围	线速度	用途
FBCP	VA型	丁腈橡胶	HS70±5	黑色	-30~100℃	0.03MPa 以下	19m/s 以下	耐矿物油、水、空气等 轴用旋转密封

①适用标准：JB/T 6994-2007

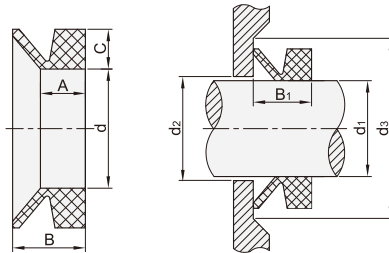

型号		公称轴径	d ₁ 轴径	d	C	A	B	d ₂ (max)	d ₃ (min)	B ₁ 安装宽度			
① 代码	② 规格												
FBCP	003	3	2.7~3.5	2.5	1.5	2.1	3	d ₁ +1	d ₁ +4	2.5±0.3			
	004	4	3.5~4.5	3.2	2	2.4	3.7		d ₁ +6	3.0±0.4			
	006	6	5.5~6.5	5									
	007	7	6.5~8.0	6									
	008	8	8.0~9.5	7									
	010	10	9.5~11.5	9	3	3.4	5.5	d ₁ +2	d ₁ +9	4.5±0.6			
	012	12	11.5~12.5	10.5									
	014	14	13.5~15.5	12.5									
	016	16	15.5~17.5	14									
	018	18	17.5~19	16				4	4.7	7.5	d ₁ +3	d ₁ +12	6.0±0.8
	022	22	21~24	20									
	025	25	24~27	22									
	028	28	27~29	25									
	030	30	29~31	27									
	032	32	31~33	29									
	035	35	33~36	31	5	5.5	9	d ₁ +15	7.0±1.0				
	038	38	36~38	34									
	040	40	38~43	36									



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达