



型号 ① 代码 ② d — ③ F — ④ h
AIEJ15 — 80 — 22

■ 请按步骤①~④选择
型号和参数后进行订购。




型号区分：
代码 5 天发货

支
座
组
件
丝
杠


09




代码	类型	材质	表面处理
AIEJ	一般型传动座 低窄轨型	铸铁	发黑




适用规格：
AIEJ1012-38/40
AIEJ20-60/60S

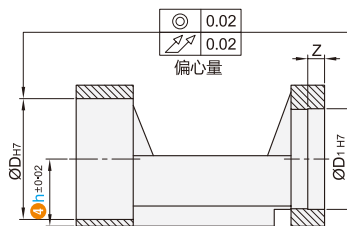

旋转剖面 A-A

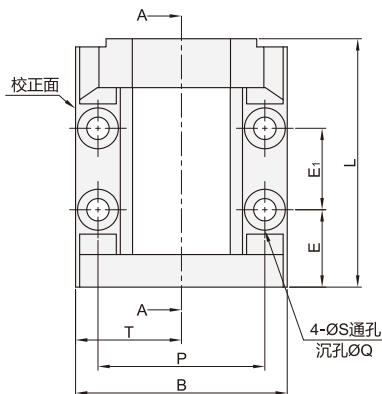

适用规格：
AIEJ0608
AIEJ1012-57/60/60S
AIEJ15
AIEJ20-80/80S/86

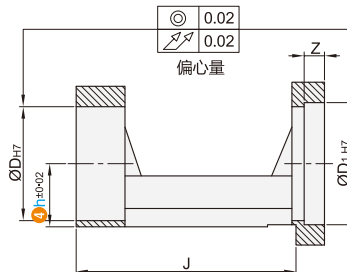

旋转剖面 A-A

型号				适用 电机类型	D ₁	P.C.D	M	D	L	B	P	T	S	Q	E	E ₁	Z	J	建议丝杠支座		建议电机规格							
代码	适用丝杠轴径 ed	适用电机法兰中心高 ef* oh	固定侧																止口 规格	安装 P.C.D	安装孔							
AIEJ	0608※	38	15.5	伺服电机	30	45	M3	28	61	52	41	26	5.5	9.5	19	20	5	54	AIRW06A/08A	30	45	Ø3.4						
		46				M4										46		Ø4.5										
		38				45	M3									45		Ø3.4										
		40				46	M4	36	74	65	50	32.5			24	20		46	Ø4.5									
	1012※	60	20		50	70	M5					6.6	11		24	20	65	AIRW10A/12A	50	70	Ø5.5							
		60S					M4								25			74			Ø4.5							
		60					M4	40		84	70	55	35							Ø5.5								
		60S					M6		94					30	28					Ø4.5								
	15	80	22		70	90	M5		92								6	82	AIRW15A	70	90	Ø6.5						
		80S					M5										81		Ø6									
		60					50	70	M4	57	113	88	70	44	8.5	14	29	42	5		平底	AIRW20A	50	70	Ø5.5			
		60S					M6															Ø4.5						
	20	80	30		70	90	M5											6	102		70	90	Ø6.5					
		80S																					Ø6.5					
		1012						57	20	步进电机	38.1	66.7	M4	36	74	65	50	32.5	6.6	11	24	20	5	75	AIRW10A/12A	38.1	66.7	Ø4.6
		15						22	40					82	70	55	35			28	28	63						
15	22		92															81	AIRW15A									
20	30	73	98.4	M6	57	113	88	70	44					8.5	14	29	28	6	102	AIRW 20A	73	98.4		Ø7				

① *带S为松下电机，不带为其它品牌电机。

② ※0608适用丝杠轴径Ø6或Ø8，1012适用丝杠轴径Ø10或Ø12。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达