

轴承用调整环 ▶ 轴承/关节轴承/轴承座组件

外圈用



型号 (1) 代码 · (2) D — (3) L
BACLSB6 — 5

■ 请按步骤 ①~③ 选择型号和参数后进行订购。




型号区分: **7** 天发货
 代码




适用	L尺寸公差		材质	表面处理
	负公差	正公差		
外圈用	BACLS	BACLT	铝合金	—
	BACLSB	BACLTB	S45C	发黑
	BACLSM	BACLTM		无电解镀锌
	BACLS	BACLS	SUS304	—

25 / (6.3 /)

(L尺寸负公差)

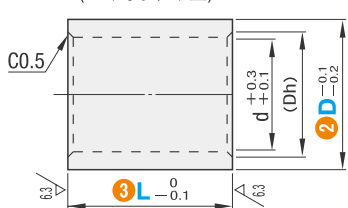

(L尺寸正公差)

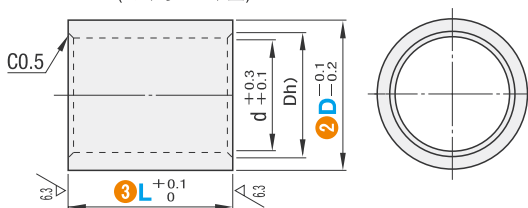

* L = 低于3 C0.2以下

型号		③ L 指定单位0.1mm	d	(Dh)	适用轴承	
① 代码	② D					
外圈用 (负公差)	6	1.0~50.0	4	5	673	
	7		5	6	674	
	8		5	6	693	
	10		7	8	623	
	11		7	8	694	
	13		9	10	624	
	14		10	11	605	
	15		10	11	696	
	16		11	12	625	
	17	3.0~50.0	12	13	606	
	19		14	15	626	
	19A		16	17	6800	
	BACLS		18	19	6801	
	BACLSB		17	18	608	
	BACLSM		19	20	628	
	BACLS	24	20	21	6900	
	24A	21	22	6802		
	26	3.0~100.0	20	21	6000	
	26A		23	24	6803	
28	22		23	600		
30	24		25	6200		
BACLT	25		26	6201		
BACLTB	29		30	6804		
BACLTM	29		30	6202		
BACLS	31		32	6904		
32	34		35	6805		
32A	34		35	6004		
35	39		40	6806		
37	39		40	6204		
37A	44		45	6807		
42	45		46	6205		
42A	49	50	6808			
47	46	47	6006			
47A	55	56	6206			
52						
52A						
55						
62						



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达