




型号 ①代码·②d) — ③L
 AFBZ8 — 20
 AFBZU10 — 25

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④代码 7 天发货

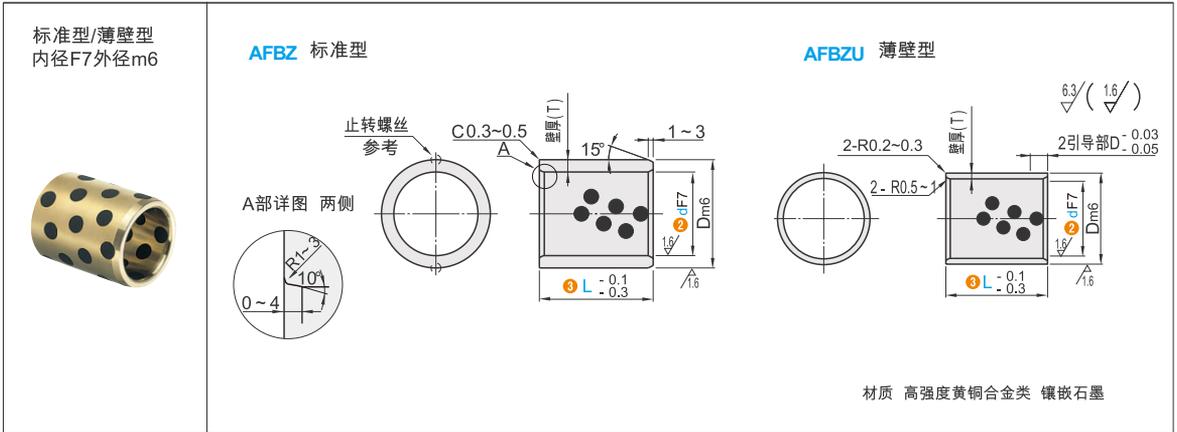

型号		③ L	AFBZ		AFBZU		
① 代码	② dF7		Dm6	壁厚 T	Dm6	壁厚 T	
AFBZ AFBZU	5 +0.022	8 10 12 15	9	2	M4×8	7	
	6 +0.010	8 9 10 12 15 16 20	10			8	
	8 +0.028	8 10 12 15 16 20 25	12			10	
	10 +0.013	8 10 12 15 16 20 25 30	14			12	
	+0.034 +0.016	12	8 10 12 15 16 20 25 30 35			18	15
		13	10 12 15 16 20 25 30 35			19	16
		15	10 12 15 16 20 25 30 35 40			21	18
		16	10 12 15 16 19 20 25 30 35 40			22	20
		18	10 12 15 16 19 20 25 30 35 40			24	22
		20	10 12 15 16 20 25 30 35 40 50 60			28	24
	+0.041 +0.020	20A	10 12 15 16 20 25 30 35 40 50	30	5	M5×8	24
		25	12 15 16 20 25 30 35 40 50 60	33	4		29
		25A	12 15 16 20 25 30 35 40 50 60	35	5		-
		30	12 15 16 20 25 30 35 40 50 60 70	38	4		34
	+0.050 +0.025	35	20 25 30 35 40 50 60 70	44	4.5	M6×16	40
		40	20 25 30 35 40 50 60 70 80	50	5		45
		50	30 35 40 50 60 70 80	62	6		55
	+0.060 +0.030	60	50 60 70 80	75	7.5	M8×16	-
		80	60 70 80	96	8		-
		100	80 100	120	10		-

AFBZU只适用于d≤30规格

润滑条件	定期润滑	无润滑
容许最大负载	29.0 (98.0) N/mm ²	0.5m/s
	296 (1000) kgf/cm ²	
容许最大速度	1.00m/s	30m/min
	60m/min	

()内表示容许静态表面压力

