




代码	材质	表面处理	附件
ABSTBN	S45C	发黑	1个内六角止动螺丝
ABSTMN		无电解镀锌	1个内六角止动螺丝(SUS)
ABDXS	SUS304	—	

- ① D尺寸30~50有2个附属螺栓。
- ② 安装孔D按容差H加工后，进行开口加工。有可能因加工增至H±左右。

25 / (6.3 / 1.6)

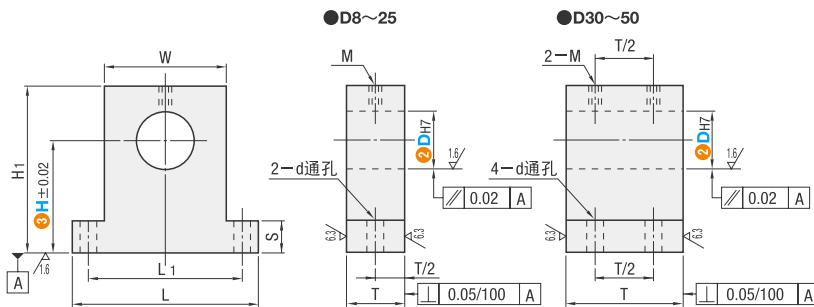

① 代码 ② D — ③ H
ABSTBN35 — 50

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 7 天发货

型号		高度选择					L	H ₁	T	S	W	L ₁	d	止动螺丝			
① 代码	② D	③ H												M			
ABSTBN ABSTMN ABDXS	8	10	15	20	25	30	40	42	H+9	15	6	18	30	6.6	M6		
	10	10	15	20	25	30	40	50	60	42	H+10	15	6	18		30	6.6
	12	10	15	20	25	30	40	50	60	42	H+11	18	6	18		30	6.6
	13	15	20	25	30	40	50	60	42	H+12	18	6	18	30		6.6	
	15	15	20	25	30	40	50	60	54	H+15	20	6	30	42		6.6	
	16	15	20	25	30	40	50	60	54	H+15	20	6	30	42	6.6	M8	
	20	20	25	30	40	50	60	80	67	H+18	25	8	35	50	9		
	25	20	25	30	40	50	60	80	67	H+20	30	8	35	50	9		
	30	25	30	40	50	60	80	85	H+23	35	10	45	65	6.6			
	35	25	30	40	50	60	80	85	H+25	35	10	45	65	6.6			
40	30	40	50	60	80	100	H+30	40	10	60	80	9	M8				
50	40	50	60	80	125	H+38	50	15	75	100	11						



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达