




■平键
螺纹沉孔型

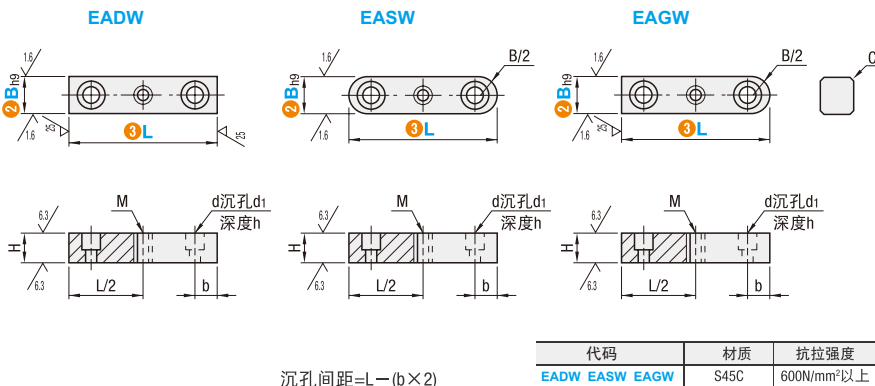

型号(①代码·②B) — ③L — ④MPC
EADW8 — 35
EADM5 — 30 — MPC8


■请按步骤①~④选择 型号和参数后进行订购。



型号区分: ④代码 7 天发货

型号			③L	H 公差		d	d ₁	h	b	M	C	L	公差
① 代码	② B _{h9}		最小单位5mm							(粗牙螺纹)			
EADW EASW EAGW	8	0	35~ 80	7	0 -0.090	3.4	6	3.5	8	M3	0.25~0.40	~ 50	0 -0.62
	10	-0.036	45~ 80	8		4.5	7.5	4.5	10	M4	0.40~0.60		
	12	0 -0.043	50~ 80	9		5.5	9.5	5.5	12	M5			
	14		50~ 90	14									
	15		50~ 90	15									
	16		60~100	16									
	18		60~110	11		6.6	11	6.5	18	M6			

■平键
螺纹拆卸型

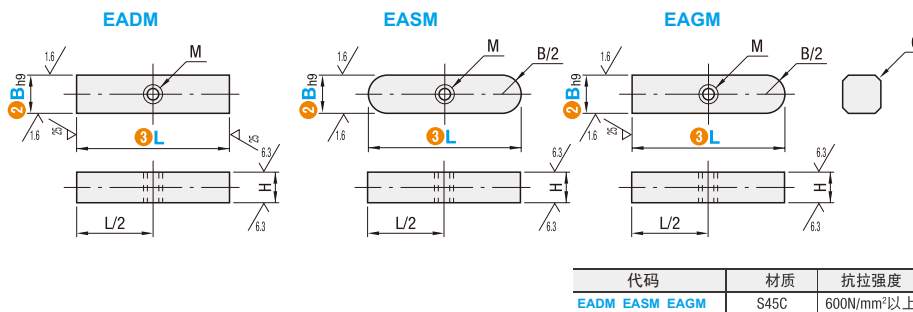


型号		③L	H 公差		M	C	L	公差
① 代码	② B _{h9}	最小单位5mm			(粗牙螺纹)			
EADM EASM EAGM	5	0	10~50	5	0	0.25~0.40	~18	0 -0.43
	6	-0.030	10~60	6	-0.030		19~30	0 -0.52
	7	0 -0.036	15~60	7	-0.036		31~50	0 -0.62
	8		15~80	8	0 -0.090	0.40~0.60	51~80	0 -0.74
	10		15~80	9			81~110	0 -0.87
	12	0 -0.043	20~80	10				
	14		30~90					
	15		30~90					
	16		40~100					
	18		40~110	11	6.6			



可选加工

可选加工

变更螺纹孔位置



④ 代码

MPC

技术说明

变更螺纹孔位置。
MPC=指定单位1mm
螺纹拆卸型
 $M \leq MPC \leq L - M$



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达