



夹具衬套

直柱·标准型



型号(①代码·②d) — ③L
DAA12 — 10

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: ④代码 **7** 天发货

■ 标准型



| 代码 | | 材质 | 表面处理 | 硬度 |
|-------|--------|---------|-------|--------------|
| D尺寸p6 | D尺寸m6 | | | |
| DAA | DAAM | SKS3 | — | 淬火硬度60HRC~ |
| DAAN | DAAMN | SKS3 | 无电解镀镍 | 淬火硬度60HRC~ |
| DAAC | DADYSS | SUS440C | — | 淬火硬度50~55HRC |

25 / (0.4√G)

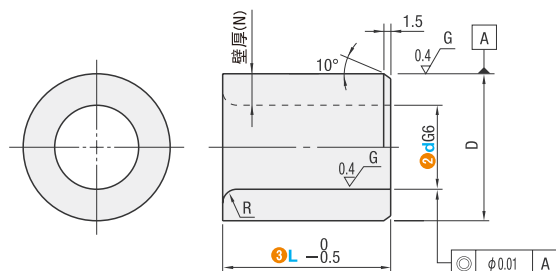

| d | d公差 | |
|----|------------------|------------------------|
| | 无表面处理 | 无电解镀镍 |
| 2 | +0.008 | +0.010 |
| 3 | +0.002 | 0 |
| 4 | +0.012 +0.004 | H7 +0.012 0 |
| 5 | | |
| 6 | +0.014 +0.005 | +0.014 +0.005 |
| 8 | | |
| 10 | +0.017 +0.006 | G6 +0.017 +0.006 |
| 12 | | |
| 13 | +0.020 +0.007 | +0.020 +0.007 |
| 15 | | |
| 16 | +0.020 +0.007 | +0.020 +0.007 |
| 20 | | |
| 25 | +0.020 +0.007 | +0.020 +0.007 |
| 25 | | |

| D | D公差 | |
|----|------------------|------------------|
| | p6 | m6 |
| 5 | +0.020 +0.012 | +0.012 +0.004 |
| 7 | +0.024 +0.015 | +0.015 +0.006 |
| 8 | | |
| 10 | +0.029 +0.018 | +0.018 +0.007 |
| 12 | | |
| 15 | +0.035 +0.022 | +0.021 +0.008 |
| 18 | | |
| 22 | +0.042 +0.026 | +0.025 +0.009 |
| 25 | | |
| 26 | +0.042 +0.026 | +0.025 +0.009 |
| 30 | | |
| 35 | +0.042 +0.026 | +0.025 +0.009 |
| 35 | | |

定位销
夹具衬套

20

| 型号 | | ③L选择 | | | | | | | | | | D | 壁厚(N) | R | | | | |
|-----------------------------|---------------------------------|------|---|---|---|----|----|----|----|----|----|----|-------|-----|-----|-----|-----|---|
| ①代码 | ②d | 5 | 6 | 7 | 8 | 10 | 12 | 15 | 16 | 20 | 25 | | | | | | | |
| <p6> DAA DAAN DAAC | <m6> DAAM DAAMN DADYSS | 2 | 5 | 6 | 7 | 8 | 10 | 12 | | | | | 5 | 1.5 | 0.8 | | | |
| | | 3 | 5 | 6 | 7 | 8 | 10 | 12 | | | | | 7 | 2 | 0.8 | | | |
| | | 4 | 5 | 6 | 7 | 8 | 10 | 12 | 15 | 16 | 20 | | | 8 | 2 | 1 | | |
| | | 5 | 5 | 6 | 7 | 8 | 10 | 12 | 15 | 16 | 20 | | | 10 | 2.5 | 1 | | |
| | | 6 | 5 | 6 | 7 | 8 | 10 | 12 | 15 | 16 | 20 | 25 | | | 10 | 2 | 1 | |
| | | 8 | 5 | 6 | 7 | 8 | 10 | 12 | 15 | 16 | 20 | 25 | | | 12 | 2 | 2 | |
| | | 10 | | 6 | 7 | 8 | 10 | 12 | 15 | 16 | 20 | 25 | | | 15 | 2.5 | 2 | |
| | | 12 | | | | 8 | 10 | 12 | 15 | 16 | 20 | 25 | 30 | | | 18 | 3 | 2 |
| | | 13 | | | | | 10 | 12 | 15 | 16 | 20 | 25 | 30 | | | 22 | 4.5 | 2 |
| | | 15 | | | | | | 12 | 15 | 16 | 20 | 25 | 30 | | | 25 | 5 | 2 |
| | | 16 | | | | | | 12 | 15 | 16 | 20 | 25 | 30 | | | 26 | 5 | 2 |
| | | 20 | | | | | | 12 | 15 | 16 | 20 | 25 | 30 | | | 30 | 5 | 3 |
| | | 25 | | | | | | | | 16 | 20 | 25 | 30 | 35 | | 35 | 5 | 3 |

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613