



定位销



带肩型

内螺纹型·P尺寸固定型



型号(1代码·2D) — 3P
DAJUB8 — 6

■请按步骤①~③选择型号和参数后进行订购。



型号区分: 7天发货
代码




■D尺寸公差

No.	D尺寸	m6
6	6	-0.004 -0.012
8·8T	8	-0.005 -0.014
10	10	-0.006 -0.017
12	12	-0.007 -0.020
13	13	-0.007 -0.020
16	16	-0.007 -0.020
20	20	-0.007 -0.020

■内螺纹底孔表

螺纹直径	M3	M4	M5	M8
底孔直径d ₂	2.6	3.4	4.3	6.9
底孔深度U	9.5	12	14.5	21

代码		材质	表面处理	硬度
圆型	多棱型			
DAJUB	DAJDU	SKS3	—	淬火硬度60~63HRC
DAEHKRL	DAJKJR		镀硬铬,抛光 厚度3~5μm	淬火硬度56~61HRC 镀层硬度850HV~
DASJUB	DAEJS	SUS304	—	—
DAEHJRL	DAEJRL	SUJ2	镀硬铬,抛光 厚度3~5μm	淬火硬度56~61HRC 镀层硬度850HV~

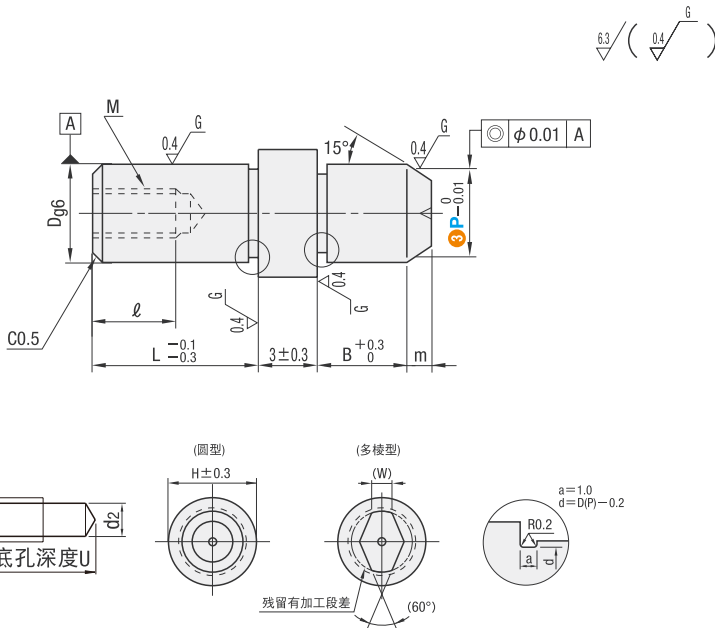

型号		P选择				L	B	M (粗牙螺纹)	D
①代码	②No.								
<圆型> DAJUB DAEHKRL DASJUB DAEHJRL	<多棱型> DAJDU DAJKJR DAEJS DAEJRL	4	5	6		10	5	M3	6
			5	6	8	15	6	M5	8
			5	6	8	15	6	M4	8
				8	10	15	8	M5	10
				8	10	12	15	M5	12
			8	10	12	13	22	M8	13
				13	14	15	16	M8	16
					16	20	30	M8	20

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613