



型号(1代码·2D) — 3t — 4W
CCDP38 — 1.2 — 600


■ 请按步骤1~4选择型号和参数后进行订购。



型号区分: 代码 7 天发货




弹簧压入式
CCDP
CCPDS
CCPDA

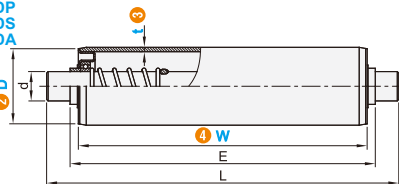


代码	类型	材质	表面处理
CCDP	弹簧压入式	钢制	镀锌
CCPDS		铝合金	本色阳极氧化
CCPDA	内螺纹型	钢制	镀锌
CCPEP		铝合金	本色阳极氧化
CCPES	扁位型	钢制	镀锌
CCPEA		铝合金	本色阳极氧化
CCPFP	扁位型	钢制	镀锌
CCPFA		铝合金	本色阳极氧化

内螺纹型
CCPEP
CCPES
CCPEA

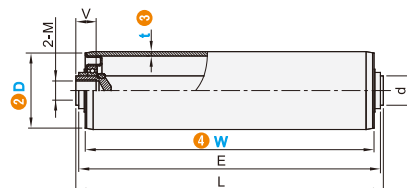

扁位型
CCPFP
CCPFS
CCPFA

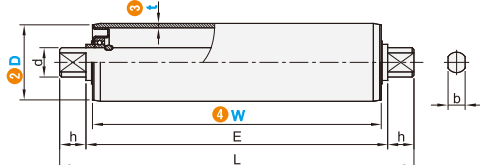

■ 弹簧压入式

型号		3 t	4 W	d 轴径	E	L	轴承
1 代码	2 D						
CCPDP	38	1.2	120~1800	12	W+9	W+31	6001
	50.6	1.5	125~1900		W+8	W+30	
		2					
	60	2.5	120~1900	12	W+10	W+32	6002 6202
	76	3	140~1900	15			
	80	3		20		W+40	6204
	89	3					
	4						
CCPDS	38	1.2	120~1800	12	W+9	W+31	6001
	50.6	1.5	125~1900		W+8	W+30	
	60	2		W+10	W+32		
CCPDA	76	3	140~1900	15	W+9	W+32	6202
	25.6	1	120~900	8	W+10	W+32	—
	38	1.5	120~1800	12	W+9	W+31	6001
	50.6		125~1900		W+8	W+30	
	60	2			W+32		
	76	3	135~1900	15	W+10	W+32	6202
	80	4	140~1900	20		W+40	6204

■ 内螺纹型

型号		3t	4W	d 轴径	E	L	M	V	轴承
1代码	2D								
CCPEP	38	1.2	120~1800	12	W+9	W+11	M8	15	6001
	50.6	1.5	120~1900		W+8	W+10			
	60	2			15	W+10			
	76	2.5		M10			20	6202	
	80	3	20	M12			25	6204	
	89	3							
	4								
	CCPES	38	1.2	120~1800	12	W+9	W+11	M8	15
50.6		1.5	W+8	W+10					
60		2	15	W+10	W+12	M10	20	6202	
76		3							
CCPEA	38	1.5	120~1800	12	W+9	W+11	M8	15	6001
	50.6	2	W+8		W+10				
	60	2	15	W+10	W+12	M10	20	6202	
	76	3							
	80	4							

■ 扁位型

型号		t	W	d 轴径	E	L	b	h	轴承			
①代码	②D	③	④									
CCPFP	38	1.2	120~1800	12	W+9	W+31	10	11	6001			
	50.6	1.5	120~1900		W+8	W+30						
	60	2			W+10	W+32						
	76	3				12				11	6202	
	80	4		20	W+40	16	15	6204				
	89	3										
		4										
	CCPFS	38	1.2	120~1800	12	W+9	W+31	10	11	6001		
50.6		1.5	120~1900	W+8		W+30						
60		2		W+10		W+32						
76		3		15		12	11				6202	
CCPFA	38	1.2	120~1800	12	W+9	W+31	10	11	6001			
	50.6	1.5	120~1900		W+8	W+30						
	60	2			W+10	W+32						
	76	3				15				12	11	6202
	80	4				20				16	15	6204



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达