



# 定位导向零件

## 带垫片·带垫板止动圈/止动块 聚氨酯型·橡胶型



型号(1代码·2No.) — 3 T  
DBUWH4 — 8


■请按步骤①~③选择型号和参数后进行订购。



型号区分: 代码 7 天发货

■ 聚氨酯型  
带垫片聚氨酯止动圈

代码	聚氨酯		垫圈
	材质	硬度	材质
DBUWH	乙醚类聚氨酯(黑色)	肖氏A90	SUS304



型号		3 T	D	d <sub>1</sub>	d <sub>2</sub>	V
1 代码	2 No.					
DBUWH	3	7	15	14	6	3
		10				
	4	8	20	19	8	4
		15				
	5	9	25	24	9.5	5
		20				
	6	10	30	29	11	6
		25				
	8	12	40	39	14	8
		30				
10	14	50	49	17	10	
	35					



型号(1代码·2No.) — 3 T — 4 L  
DBTWH6 — 10  
DBTUPL12 — 6 — 30


■请按步骤①~④选择型号和参数后进行订购。



型号区分: 代码 7 天发货

■ 低弹性橡胶型  
带垫片低弹性橡胶挡圈


代码	橡胶		垫圈
	材质	硬度	材质
DBTUWH	橡胶	肖氏A57	SUS304

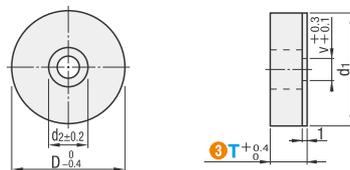

型号		3 T	D	d <sub>1</sub>	d <sub>2</sub>	V	冲击吸收量 (kgf·cm)	耐负载 (kgf)
1 代码	2 No.							
DBTUWH	3	7	15	14	6	3	0.112	4.2
		10					0.161	3.6
	4	8	20	19	8	4	0.261	8.0
		15					0.474	6.8
	5	9	25	24	9.5	5	0.523	14.0
		20					0.919	21.4
	6	10	30	29	11	6	2.018	16.4
		25					2.221	41.6
8	12	40	39	14	8			
	12							

■ 低弹性橡胶型  
带垫板低弹性橡胶挡块

代码	橡胶		板
	材质	硬度	材质
DBTUPL	橡胶	肖氏A57	SUS304

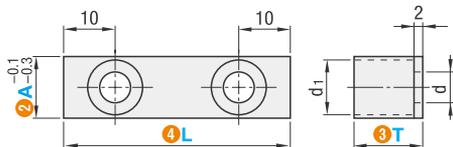

型号		3 T 选择	4 L 选择	d	d <sub>1</sub>	冲击吸收量 (kgf·cm)	耐负载 (kgf)
1 代码	2 A						
DBTUPL	12	6	30	3.5	6.5	0.217	6.6
			50			0.577	17.6
			30			0.324	6.0
	10	10	50	3.5	4.5	0.786	14.6
			30			0.408	7.4
			50			1.024	19.0
	19	10	50	4.5	8.0	1.234	23.0
			75			2.51	47.0

询价④种方式



官网 <http://www.srdfaa.com>  
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863  
客服热线 0755-27926613