



型号(1)代码·(2)D — (3)Y — (4)F
 BDFHA12 — 5 — F15
 BDFHA20 — 20 — F35

■ 请按步骤①~④选择型号和参数后进行订购。




型号区分: 代码 **7** 天发货

■ 标准型



代码	材质	表面处理
BDFHA	S45C	发黑
BDFPHA		无电解镀锌
BDSFHA	SUS304	—

6.3/(1.6/)

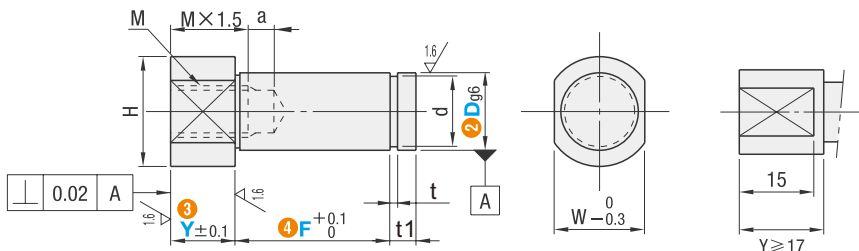

悬臂销·铰链销
支点用台阶螺丝

12


型号 ① 代码	② Dg6		最小单位1mm		M (粗牙螺纹)	H	W	d		t	t1
	③ Y	④ F	基准尺寸	公差							
BDFHA BDFPHA BDSFHA	6	-0.004 -0.012	2~60	5~100	M3	10	8	5	+0.075 0	0.7	2
	8	-0.005 -0.014			M4	12	10	7	+0.090 0	0.9	3
	10	-0.006 -0.017			M6	15	13	9.6	0 -0.090	1.15	4
	12	-0.006 -0.017	10~100	M8	17	14	11.5	0 -0.110	1.15	4	
	15	-0.007 -0.020		M10	20	17	14.3	0 -0.210	1.35	4	
20	-0.007 -0.020	4~60	M12	26	24	19	0 -0.210	1.35	4		

■ 台阶型



代码	材质	表面处理
BDDECH	S45C	发黑
BDDFCN		无电解镀锌
BDDGS	SUS304	—

6.3/(1.6/)

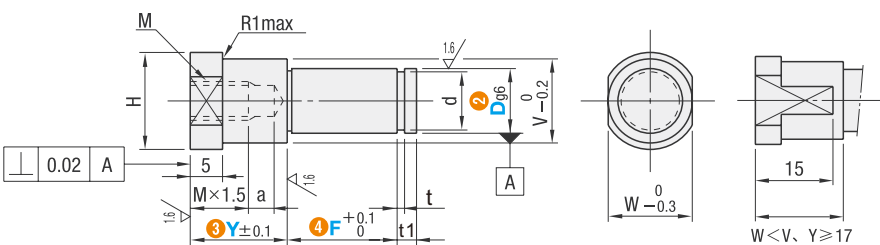

型号 ① 代码	② Dg6		最小单位1mm		M (粗牙螺纹)	a	V	H	W	d		m	n
	③ Y	④ F	基准尺寸	公差									
BDDECH BDDFCN BDDGS	6	-0.004 -0.012	7~60	5~100	M3	5	8	10	8	5	+0.075 0	0.7	2
	8	-0.005 -0.014			M4		10	12	10	7	+0.090 0	0.9	3
	10	-0.006 -0.017			M6		13	15	13	9.6	0 -0.090	1.15	4
	12	-0.006 -0.017	10~100	M8	15		17	14	11.5	0 -0.110	1.15	4	
	15	-0.007 -0.020		M10	18		20	17	14.3	0 -0.210	1.35	4	
20	-0.007 -0.020	7~60	M12	7	24	26	24	19	0 -0.210	1.35	4		

