

法兰一体型无油衬套

铜合金标准法兰内径F7型·内径G6型

无油衬套




型号 ①代码·②d) — ③L
AFTZ12 — 30
AFTP16 — 35

■请按步骤①~③选择型号和参数后进行订购。




型号区分: ④代码 7 天发货

■标准法兰型 内径F7·G6型

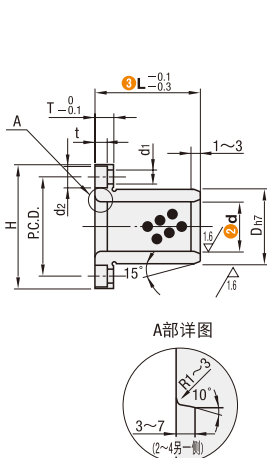


圆法兰型
AFTZ (内径F7)
AFTP (内径G6)

d=6~13 2-安装孔




d=16~50 4-安装孔




方法兰型
AFTSZ (内径F7)

4-安装孔




4-安装孔




两面切割法兰型
AFTNZ (内径F7)
AFTNP (内径G6)

6.3/1.6

2-安装孔



4-安装孔



材质 高强度黄铜合金类 镶嵌石墨

附件 短头内六角螺栓2~4个

型号		③ L	Dh7	H	T	t	d1	d2	P.C.D.	W	F	A	附件 短头内六角螺栓
① 代码	② df7												
内径F7型 AFTZ AFTSZ AFTNZ	6	+0.022 +0.010	15 20	10	-0.015	25			17	20		17	M3-10×2
	8	+0.028	20 25	12	0	27			19	22		19	* (4)
	10	+0.013	20 25 30	14	-0.018	29			21	23		21	
	12		20 25 30	18		36			26	28		26	M4-12×2
	13	+0.034 +0.016	20 25 30 35	19	0	37			27	29		27	* (4)
	16		20 25 30 35 40	22	-0.021	40			30	31	18	24	M4-12×4
	20		25 30 35 40 50	28		49			38	38	22	31	
	25	+0.041 +0.020	30 35 40 50 60	33		54			43	42	25	35	M5-16×4
	30		35 40 50 60 70	38	0	63			50	50	30	40	
	35		50 60 70	44	-0.025	69			56	54	36	43	M6-20×4
	40	+0.050 +0.025	60 70 80	50		82			66	64	38	54	
	50		70 80 100	62	-0.030	94			78	73	50	60	M8-25×4

* () 为AFTSZ的螺栓数量

型号		③ L	Dh7	H	T	t	d1	d2	P.C.D.	F	A	附件 短头内六角螺栓
① 代码	② dg6											
内径G6型 AFTP AFTNP	6	+0.012 +0.004	15	10	-0.015	25			17		17	
	8	+0.014	20	12	0	27			19		19	M3-10×2
	10	+0.005	25	14	-0.018	29			21		21	
	12		25 30	18		36			26		26	
	13	+0.017 +0.006	25 30 35	19	0	37			27		27	M4-12×2
	16		25 30 35 40	22	-0.021	40			30	18	24	M4-12×4
	20		30 35 40	28		49			38	22	31	
	25	+0.020 +0.007	30 35 40	33	0	54			43	25	35	M5-16×4
	30		35 40 50	38	-0.025	63			50	30	40	M6-20×4



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达