



定位销



进给销

肩型直杆型



型号(①代码·②D) — ③P — ④L — ⑤B — ⑥E
DAFPM5 — P3.50 — L5 — B6.0 — E4.0

■请按步骤①~⑥选择
型号和参数后进行订购。



型号区分: ⑦天发货
代码

■标准型




■D尺寸公差


D	D公差 m6
2	+0.008
3	+0.002
4	+0.012
5	+0.004
6	+0.015
8	+0.015
10	+0.006

代码		材质	表面处理	硬度
圆型	三角型			
DAFPM	DALFKR	SKS3	—	淬火硬度60~63HRC
DAGFPM	DALFKRL		镀硬铬 厚度3~5μm	
DASFPM	DAYPS	SUS304	—	—
DALFSL	DALGSL		镀硬铬 厚度5~8μm	
DACFPM	DALGSSR	SUS440C	—	淬火硬度50~55HRC

■圆型

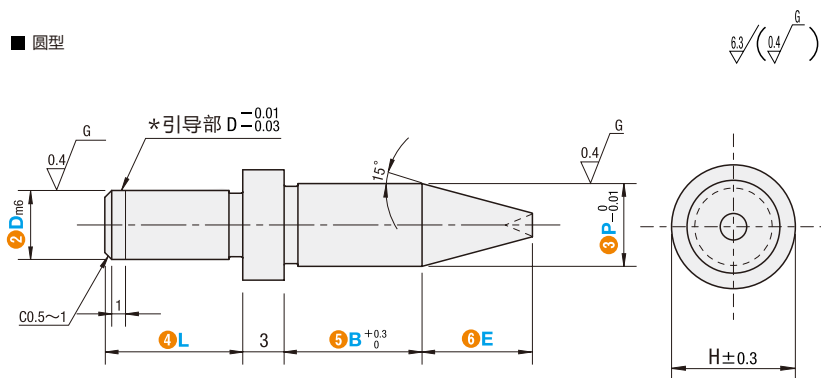

■三角型

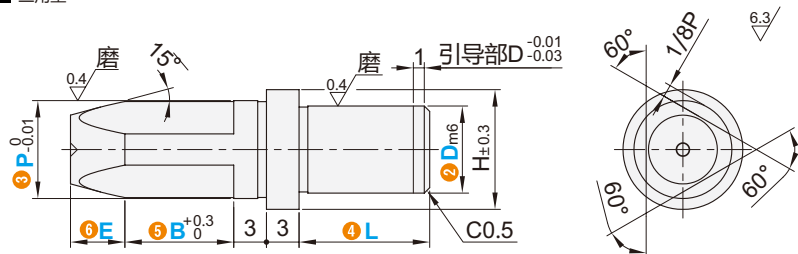

型号		③P	④L	⑤B	⑥E	H
①代码	②D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm	
DAFPM	2	2.00~3.00	2~6	2.0~10.0	0.5~10.0	5
DALFKR	3	2.00~5.00	3~6	2.0~10.0	0.5~10.0	6
DAGFPM	4	2.00~5.00	4~8	2.0~10.0	0.5~10.0	6
DALFKRL	5	3.00~7.00	5~10	2.0~10.0	0.5~10.0	8
DASFPM	6	4.00~7.00	6~12	2.0~12.0	0.5~10.0	8
DALFSL	8	5.00~9.00	8~16	2.0~15.0	0.5~10.0	11
DALGSL	10	6.00~11.00	10~20	2.0~20.0	0.5~10.0	13
DACFPM						
DALGSSR						

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613