



定位销

螺栓固定型



型号(①代码·②NO.)

DALZ5

③P

P16.0

④B

B25.5

⑤G

G15

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分:


代码

7

天发货



代码	材质	表面处理	硬度
DALZ	S45C	—	淬火硬度45~50HRC
DALZB	45(S45C)	发黑	淬火硬度45~50HRC
DALZC	SUS440C	—	淬火硬度50~55HRC
DALZS	SUS304	—	—
DABWCRL	S45C	镀硬铬,抛光 厚度3~5μm	淬火硬度43~48HRC 镀层硬度850HV~
DABWS	SUS304	—	镀硬铬

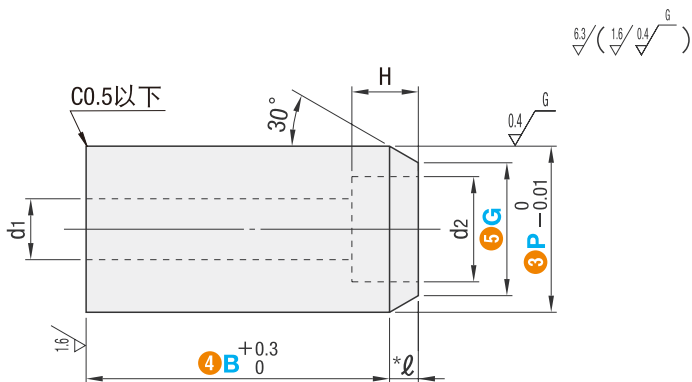

$$*H = \frac{P-G}{2 \tan 30^\circ}$$

参考: $2 \tan 30^\circ \approx 1.15$

型号		③P	④B	⑤G	d1	d2	H	适用螺栓
①代码	②No.	最小单位0.01mm	最小单位0.1mm	最小单位1mm				
DALZ	3	11.00~15.00	10.0~25.0	9 ≤ G < P	3.5	6.5	4	M3
DALZB	4	12.00~20.00	10.0~25.0	10 ≤ G < P	4.5	8	5	M4
DALZC	5	14.00~20.00	10.0~30.0	12 ≤ G < P	5.5	9.5	6	M5
DALZS	6	15.00~25.00	12.0~40.0	13 ≤ G < P	6.5	11	7	M6
DABWCRL	8	18.00~25.00	14.0~50.0	16 ≤ G < P	9	14	9	M8

