



型号(1代码·2D) — 3P — 4L — 5B
DAFJD12 — P11.97 — L12 — B5.5

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分: 代码 7 天发货





代码		材质	表面处理	硬度
圆型	多棱型			
DAFJA	DAFJD	SKS3	—	淬火硬度60~63HRC
DACFJA	DACFJD	SUS440C	—	淬火硬度50~55HRC
DASFJA	DAEGS	SUS304	—	—
DAEEKRL	DAEFKRL	SKS3	镀硬铬 厚度3~5μm	淬火硬度58~61HRC 镀层硬度850HV~

6.3 (0.4) G

■ D尺寸公差

D尺寸	m6
2	+0.008
3	+0.002
4	
5	+0.012
6	+0.004
8	
10	+0.015
12	+0.006
13	
16	+0.018
20	+0.007
	+0.021
	+0.008

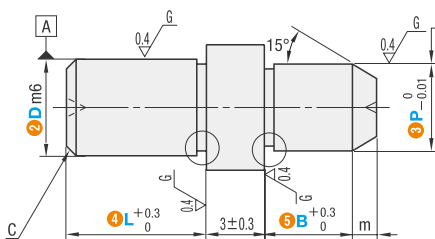

D(P) ≥ 3时 a=1.0 d=D(P)-0.2
D(P) < 3时 a=0.5 d=D(P)-0.1

型号		3P 最小单位0.01mm	4L 最小单位1mm	5B 最小单位0.1mm	m	H	(W)	C
1 代码	2 D							
<圆型> DAFJA DASFJA DACFJA DAEEKRL	2	1.50~2.00	2~4	2.0~10.0	0.5	6	—	0.5
	3	2.00~4.00	3~6	2.0~10.0	1	6	1	0.5
	4	2.00~5.00	4~8	2.0~10.0	1	6	1.2	1
	5	3.00~6.00	5~10	2.0~15.0 (10.0)	2	8	1.5	1
	6	4.00~7.00	5~12	2.0~15.0	2	8	1.8	1
	8	5.00~9.00	5~16	2.0~20.0 (15.0)	3	11	2.2	1.5
	10	7.00~12.00	8 (10)~20	3.0~30.0 (25.0)	3	13	3	2
	12	7.00~12.00	10~24	3.0~30.0 (25.0)	3	15	3.2	2
	13	8.00~13.00	13~26	5.0~30.0 (25.0)	4	16	3.5	2
	16	13.00~16.00	16~32	5.0~30.0	4	19	4	3
20	16.00~20.00	20~40	5.0~30.0	5	23	5.5	3	
<多棱型> DAFJD DACFJD DAEFKRL DAEGS		① 适用于D ≥ 3						

① L · B ()尺寸适用于多棱型。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD 仕瑞达