



悬臂销/铰链销/支点用台阶螺丝

轴径公差可选型铰链销

■ 请按步骤①~⑥选择型号和参数后进行订购。

型号
 ① 代码 ② D公差选择 ③ D — ④ L — ⑤ F — ⑥ E
 BDKLC M 15 — 90.3
 BDKLS F 15 50.5 — F0 — E10



型号区分:

代码


7 天发货




代码		代码		材质	硬度	表面处理	附件(1个)	
挡圈固定型	螺帽固定型	两端内螺纹型	止动螺丝固定型				挡圈1个	U型螺帽1个
BDKLC	BDKLB	BDKLM	BDKLS	S45C	—	发黑	弹簧钢	弹簧钢
BDKLHC	BDKLHB	BDKLHM	BDKLHS		40~45HRC			
BDPKLC	BDPKLB	BDPKLM	BDPKLS		—	无电解镀锌	SUS304	SUS304
BDPKLHC	BDPKLHB	BDPKLHM	BDPKLHS		40~45HRC			
BDBNCLC	BDBPCLB	BDBQCLM	BDBRCLS	SUS304	45~50HRC 镀层硬度850HV~	镀硬铬	弹簧钢	弹簧钢
BDKLSLC	BDKLSLB	BDKLSM	BDKLSLS		—			
BDKLSHC	BDKLSHB	BDKLSHM	BDKLSHS	SUS440C	45~50HRC	—	SUS304	SUS304

D	公差选择					
	M m6	P p6	H h7	F f8	C c9	LF —
2·3	+0.008 +0.002	+0.012 +0.006	0 -0.010	-0.006 -0.020	-0.060 -0.085	-0.025 -0.034
4·5·6	+0.012 +0.004	+0.020 +0.012	0 -0.012	-0.010 -0.028	-0.070 -0.100	-0.025 -0.037
8·10	+0.015 +0.006	+0.024 +0.015	0 -0.015	-0.013 -0.035	-0.080 -0.116	-0.025 -0.040
12~18	+0.018 +0.007	+0.029 +0.018	0 -0.018	-0.016 -0.043	-0.095 -0.138	-0.025 -0.043
20~25	+0.021 +0.008	+0.035 +0.022	0 -0.021	-0.020 -0.053	-0.110 -0.162	-0.025 -0.046


■ 挡圈固定型(C型)

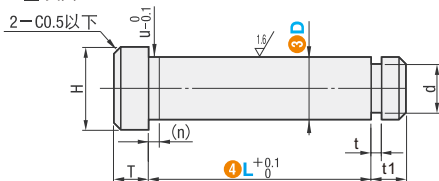


■ 两端内螺纹型(M型)

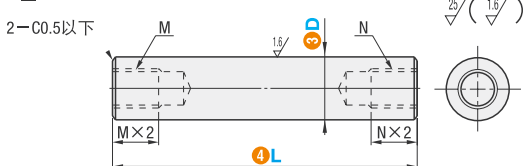

■ 螺帽固定型(B型)

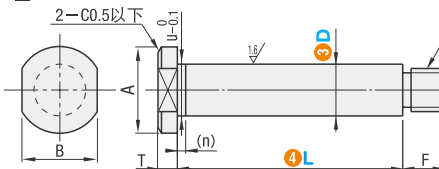

■ 止动螺丝固定型(S型)

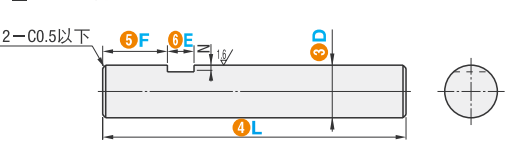

型号
 ① 代码 ② D公差选择 ③ D — ④ L — (NC · TC...etc.)
 BDKLC F 15 — 90.3 — NC3.5~TC3.5

	变更挡圈槽位置	变更肩厚	变更螺纹长度	变更螺纹直径	变更肩厚	变更L尺寸公差
可选加工						
代码	NC	TC	FC	MC	TC	LKC
技术说明	指定方法 NC3.5 D NC (最小单位0.1mm) 2~4 1.5~3 5 1.7~3 6 1.9~4 8 2.4~5 10~15 2.7~5 20~25 2.9~5 ① 全长=L+NC+T.	指定方法 TC3 ① TC=最小单位0.5mm ② T<TC≤5 ③ 全长=L+N+TC	指定方法 FC4 ① FC=最小单位1mm M(MC)≤FC≤M(MC)×3	指定方法 MC3 D MC (选择范围) 5 3 6 3 4 8 3 4 5 10 4 5 6 12 5 6 8 15 6 8 10 20 8 10 12 25 10 12 ① D12、MC5时, 请与FC一同使用 ② D4不适用	指定方法 TC3 ① TC=最小单位0.5mm ② 2≤TC≤5	指定方法 LKC 变更L尺寸公差为±0.05。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613



■ 固定型

型 号			④L 最小单位0.1mm	t		t1	d		T	H	附属挡圈	
① 代码	② D公差选择	③ D		公差			公差				形状	JIS公称规格
BDKLC BDKLHC BDPKLC BDPKLHC BDBNCLC BDKLSC BDKLSHC	M (m6)	3	5.0~ 50.0	0.5	+0.05 0	2	2	+0.06 0	1.5	5.5	E型	No.2
		4			3			6.5		No.3		
	P (p6)	5	10.0~ 60.0	0.7	+0.1 0		4	+0.075 0		8		No.4
		6					5			9		No.5
	H (h7)	8	10.0~100.0	0.9	+0.14 0	3	7	+0.09 0	2	12	No.7	
		10	15.0~100.0				9.6	—0.09	14	No.10		
	F (f8)	12	15.0~150.0	1.15			11.5	0 —0.11	17	No.12		
		15	25.0~150.0				14.3		20	No.15		
	C (c9)	16					15.2		21	No.16		
		20	30.0~150.0				19	0 —0.21	4	26	No.20	
	LF (衬套用)	25		1.35			23.9	31	No.25			

■ 螺帽固定型



型号			④L 最小单位0.1mm	A	B	T	F	(d)	(N)	M (粗牙螺纹)	附属螺帽
① 代码	② D公差选择	③ D									
BDKLB BDKLHB BDPKLB BDPKLHB BDBPCLB BDKLSB BDKLSHB	M (m6)	4	5.0~ 50.0	7	5	3	6	3.9	1.5	M3	M3×0.5
		5		9	7	4		4.9		M4	M4×0.7
	P (p6)	6	10.0~100.0	10	8	5	9	5.8		M5	M5×0.8
		8		13	10			7.8		M6	M6×1.0
	H (h7)	10	15.0~150.0	16	13		12	9.8		M8	M8×1.25
		12		18	14			11.8		M10	M10×1.5
	F (f8)	15	25.0~150.0	24	21		18	14.8		M12	M12×1.75
		20		27	23			19.8			
	C (c9)	25	30.0~150.0	30	27		24	24.8		M16	M16×2.0

■ 两端内螺纹型

型号			④L 最小单位0.1mm	M (粗牙螺纹)	N (粗牙螺纹)
① 代码	② D公差选择	③ D			
BDKLM BDKLHM BDPKLM BDPKLHM BDBQCLM BDKLSM BDKLSHM	M (m6) P (p6) H (h7) F (f8) C (c9) LF (衬套用)	6	20.0~100.0	M3	M3
		8		M5	M5
		10	25.0~100.0	M6	M6
		12	25.0~150.0		
		15	35.0~150.0	M8	M8
		16	40.0~150.0	M10	M10
		20	50.0~150.0	M12	M12
		25		M16	M16

■ 止动螺丝固定型

型 号			④L	最小单位 1mm		N
① 代码	②D公差选择	③D	最小单位0.1mm	⑤F	⑥E	
BDKLS BDKLHS BDPKLS BDPKLHS BDBRCLS BDKLSL BDKLSHS	M (m6) P (p6) H (h7) F (f8) C (c9) LF (衬套用)	3	5.0~ 50.0	F=0 或 2≤F≤L/2	1≤E≤50	0.5
		4				
		5	10.0~ 60.0			
		6	10.0~100.0			
		8				
		10	15.0~100.0			
		12				
		15	25.0~100.0			
		20				
		25	30.0~100.0			

可 选 加 工	变更螺纹直径	追加拆卸用螺纹加工																													
	 M形	 S形																													
代码	MC · NC	MMC																													
技术说明	指定方法 MC3 <table><tr><th>D</th><th>MC · NC(选择范围)</th></tr><tr><td>8</td><td>3 4</td></tr><tr><td>10 · 12</td><td>4 5</td></tr><tr><td>15</td><td>5 6</td></tr><tr><td>18</td><td>6 8</td></tr><tr><td>20</td><td>8 10</td></tr><tr><td>25</td><td>10 12</td></tr></table> ⊗D6不适用 ①L≥MC×2+NC×2	D	MC · NC(选择范围)	8	3 4	10 · 12	4 5	15	5 6	18	6 8	20	8 10	25	10 12	指定方法 MMC <table><tr><th>D</th><th>M(粗牙螺纹)</th><th>ℓ</th></tr><tr><td>6</td><td>M3</td><td>6</td></tr><tr><td>8~12</td><td>M4</td><td>8</td></tr><tr><td>15~20</td><td>M6</td><td>12</td></tr><tr><td>25</td><td>M8</td><td>16</td></tr></table> ⊗D3~5不适用 ①$\frac{D-M}{2}-N \leq 1$时 F>M×2 L≥M×2 L≤M×3时, 螺纹底孔可能会贯通。	D	M(粗牙螺纹)	ℓ	6	M3	6	8~12	M4	8	15~20	M6	12	25	M8	16
	D	MC · NC(选择范围)																													
8	3 4																														
10 · 12	4 5																														
15	5 6																														
18	6 8																														
20	8 10																														
25	10 12																														
D	M(粗牙螺纹)	ℓ																													
6	M3	6																													
8~12	M4	8																													
15~20	M6	12																													
25	M8	16																													

