

新增

内螺纹型 P尺寸指定型/P.L.B尺寸指定型
小头平头型

定位销



型号(1)代码·(2)D — (3)P — (4)L — (5)B
 DAHPKR6 — P5
 DAHMKR6 — P5 — L10 — B11

■ 请按步骤①~③选择型号和参数后进行订购。





型号区分: 7天发货

■ P尺寸指定型



内螺纹型	材质	硬度	表面处理
P尺寸指定型			
DAHPKR		淬火硬度 58~61HRC	—
DAHPKRL	SKS3	淬火硬度58~61HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
DAHPS	SUS304	—	—
DAHPSL	SUS440C	淬火硬度48~53HRC	—

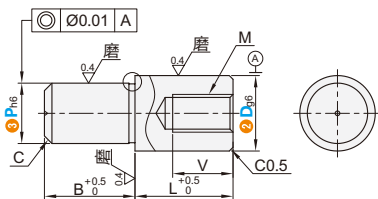

■ P尺寸公差表

P	h6
4.0~6.00	0 -0.008
6.01~10.00	0 -0.009
10.01~18.00	0 -0.011
18.01~30.00	0 -0.013

①可选加工见下表。



①SUS440C材质的D部加工有识别槽。

型号			最小单位0.01	L	B	M	V	C
①代码	②Dg6	③P						
DAHPKR DAHPKRL DAHPS DAHPSL	6	-0.004 -0.012	4.00~6.00	10	3	M3	5	0.5
	8	-0.005 -0.014	6.00~8.00	12	4	M4	8	1
	10		7.00~10.00	16	5	M5		
	12		7.00~12.00	20	6		M8	12
	13	-0.006 -0.017	8.00~13.00	22	10			
	16		10.00~16.00	24				
	20	-0.007 -0.020	13.00~20.00	32	20			3

■ P.L.B尺寸指定型



内螺纹型	材质	硬度	表面处理
P.L.B尺寸指定型			
DAHMKR		淬火硬度 58~61HRC	—
DAHMKRL	SKS3	淬火硬度58~61HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
DAHXS	SUS304	—	—
DAHSSL	SUS440C	淬火硬度48~53HRC	—

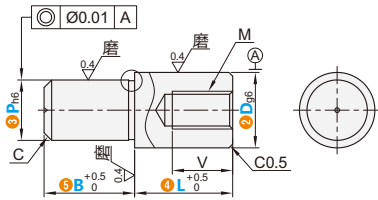

■ P尺寸公差表

P	h6
4.0~6.00	0 -0.008
6.01~10.00	0 -0.009
10.01~18.00	0 -0.011
18.01~30.00	0 -0.013

①SUS440C材质的D部加工有识别槽。

型号			最小单位0.01	最小单位1	最小单位0.1	M	V	C	可加工	型号(1)代码·(2)D — (3)P — (4)L — (5)B — (RC·CN)	
①代码	②Dg6	③P	④L	⑤B							
DAHMKR DAHMKRL DAHXS DAHSSL	6	-0.004 -0.012	4.00~6.00	8~15	2.0~12.0	M3	5	0.5		DAHPKR10 — P5 — L10 — B11 — CN	
	8	-0.005 -0.014	6.00~8.00	11~18	2.0~15.0	M4	8			DAHMKR10 — P5 — L10 — B11 — CN	
	10T		7.00~10.00	8~18	3.0~20.0	M4	6	1			
	10			11~22		M5	8				
	12T		8~20	M4		6	1.5				
	12		12~26	M5	8						
	13T	-0.006 -0.017	8.00~13.00	10~22	5.0~20.0	M6	9	2			
	13			13~28		M8	10				
	16T		10~26	M6		9					
	16		16~35	M8		12	3				
20T	-0.007 -0.020	13.00~20.00	12~32	20~42	M6	9					
20			20~42		M8	12					

代码	技术说明	
CN	<p>变更倒角C</p> <p>C0.5以下</p>	<p>【选型方法】CN</p> <p>变更P尺寸部的倒角为C0.5以下</p> <p>①D≤8时, 不适用</p> <p>②仅适用P尺寸部</p>
RC	<p>变更颈部退刀槽为R0.5</p> <p>RC (R0.5)</p>	<p>【选型方法】RC</p> <p>①D-P≤2时, 不适用</p>



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达