




型号 ① 代码 · ② d — ③ F — ④ h
AIEM10 — 60 — 30




■ 请按步骤 ①~④ 选择
型号和参数后进行订购。




型号区分：
代码 5 天发货




代码	类型		材质	表面处理
AIEM	一般型传动座	平底型	铸铁	发黑



适用规格:
AIEM10/12
AIEM15

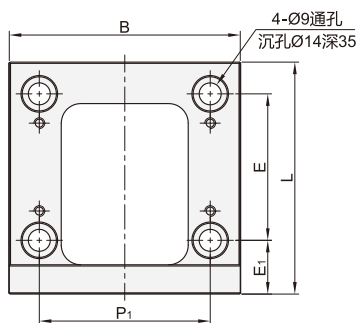

适用规格:
AIEM20

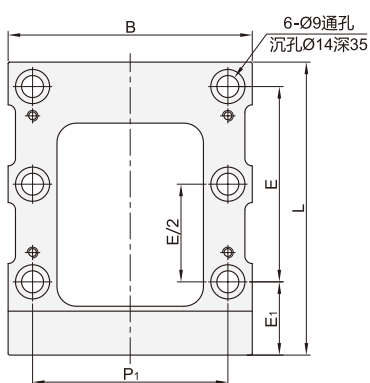



型号				适用 电机类型	D ₁	P.C.D	Y ₁	D	p.c.d	Y ₂	Z	B	H	E	E ₁	P ₁	L	建议丝杠支座		建议电机规格												
❶ 代码	适用丝杠轴径 ❷d	适用电机法兰 ❸F*	中心高 ❹h															固定侧	支撑侧	止口 规格	安装 P.C.D											
AIEM	10	60	30	伺服电机	50	70	M5	34	42	M4	5	70	57	50	23	54	88	AIRW10	—	50	70											
		60S					M4											AIRW12														
	12	60					M5	36	44									AIUNA15														
		60S					M4																									
	15	60					M5	40	50	M5	6	95	72	60	22	70	95	AIRW15	—	70	90											
		60S					M4																									
		80			70	90	M6											AIRW20														
		80S					M5																									
	20	80	45				M6	57	70	M6	7	100	85	80	30	80	120	AIRW20	—	70	90											
		80S					M5																									
	15	57	30	步进电机	38.1	66.7	M4	40	50	M5	5	70	57	50	23	54	88	AIRW15	AIUNA15	38.1	66.7											
		45	73		98.4	M6	6				95	72	60	22	70	95																
	20	86	48																													
		48	M6																													

①*带S为松下电机，不带为其它品牌电机。

