



型号(①代码·②规格)
GAFUMD40

■请按步骤①~②选择型号和参数后进行订购。




型号区分:

代码


7 天发货

■耐热型磁力扣

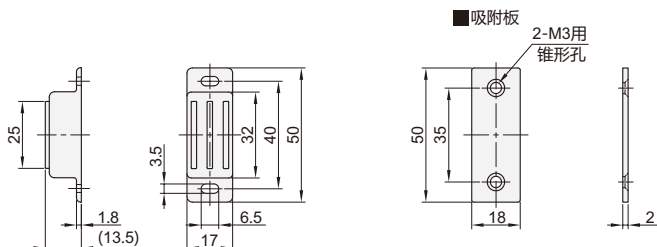

型号		吸引力 (kgf)	参考重量 (kg/pcs)
①代码	②规格		
GAFUMD	40	7.1	0.047

■双面吸附力

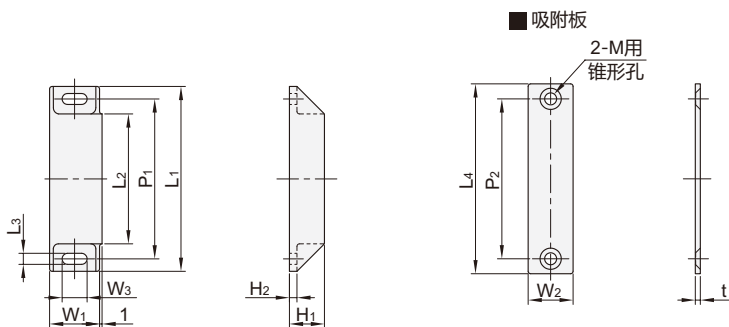

代码	类型		材质		颜色
			外壳	吸附板	
GAFUME	防尘型	强吸力	POM	SPCC	本色
GAFUMF	防静电防尘型		PP	SUS430	

①**GAFUMF**表面电阻率: $2 \times 10^{10} \Omega/\text{sq}$, 体积电阻率: $9 \times 10^{10} \Omega\cdot\text{cm}$ 。

型号		L ₁	L ₂	L ₃	L ₄	W ₁	W ₂	W ₃	H ₁	H ₂	t	P ₁	P ₂	M	吸引力 (kgf)	参考重量 (kg/pcs)	
①代码	②规格																
GAFUME	38	48	28	4.4	56	20	21	10	11.3	3	3.5	38	38	M3	1.7	0.032	
	64	74	52		85		24		14			64	64	M4	5.1	0.066	
GAFUMF	38	48	28		50		15		11.3			1.5	38	38	M3	1.4	0.022
	64	74	52		76		18		14			2	64	64	M4	7.7	0.06

