

滚珠丝杠支座组件



型号 ① 代码 · ② d — ③ F — ④ h
AIEA10 — 60S — 20

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分：
代码 **5** 天发货






代码	类型		材质	表面处理
			①③④⑥	①③④⑥
AIEA	整合型传动座	标准型	铸铁	发黑

■ 构成零件

编号	零件名称	数量
①	传动座本体	1
②	轴承	1组
③	压板	1
④	间隔环	2
⑤	油封	2
⑥	锁紧螺母	1组

① 使用之轴承经预压处理，轴向0间隙。

❗ 轴承采用P5配对DF组装，最适宜滚珠丝杠使用。

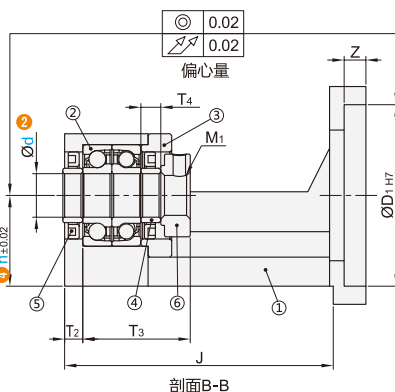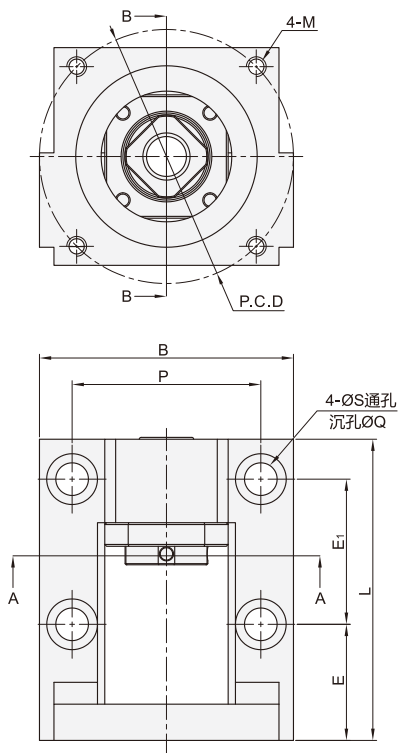

代码		型号				适用电机类型	ØD ₁	P.C.D	M	Z	B	P	L	J	E	E ₁	S	Q	H	H ₁	W ₁	T ₁	T ₂	T ₃	T ₄	M ₁	建议丝杠支座		建议电机规格	
		适用丝杠规格	适用电机法兰	中心高	支撑侧																						止口规格	安装P.C.D		
AIEA	10	60		20	伺服电机	50	70	6	M5	83	74	32	40	9	14	34	16	5	29.5	5.5	M10×1.0	—	50	70						
		60S							M4													63			50					
		60							M5													70			52					
		60S							M4																					
		60		20					M5													63			50					
		60S							M4																					
	12	60		25	步进电机	38.1	66.7	M4	70	52	47	31	19	5	29.5	5.5	M12×1.0	—	38.1	66.7										
		60S																M4												
		60		30														M5												
		60S																M4												
		57		25														42			26									
		57		30														47			31									

❗*带S为松下电机，不带为其它品牌电机。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613