




代码	材质	表面处理	附件
ABSSTBN	S45C	发黑	1个内六角螺栓
ABSSTMN		无电解镀锌	
ABDVS	SUS304	—	1个内六角螺栓(SUS)
ABDWLB	铝合金	本色阳极氧化处理	

① D尺寸30~50有2个附属螺栓。
② 安装孔D按容差H加工后，进行开口加工。有可能因加工增至H±左右。

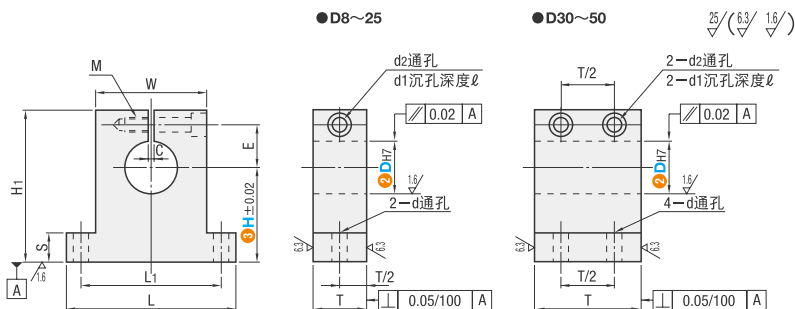

选型示范
1 代码 2 D — 3 H
 ABSSTMN20 — 30

■ 请按步骤①~③选择型号和参数后进行订购。

交货期
 型号区分：7 天发货
 代码

型号 ① 代码	② D	高度选择 ③ H						L	H ₁	T	S	W	L ₁	d	E	d ₂	d ₁	l	C	紧固螺栓 M		
		8	10	15	20	25	30														40	
ABSSTBN ABSSTMN ABDVS ABDWLB	8	10	15	20	25	30	40	48	H+18	15	6	24	36	6.6	11	6.6	11	6.5	2	M6通孔		
	10	10	15	20	25	30	40	50	60	48	H+19	15	6	24	36	6.6	12	6.6	11		6.5	2
	12	10	15	20	25	30	40	50	60	48	H+21	18	6	24	36	6.6	14	6.6	11		6.5	2
	13	15	20	25	30	40	50	60	48	H+21	18	6	24	36	6.6	14	6.6	11	6.5		2	
	15	15	20	25	30	40	50	60	54	H+23	20	6	30	42	6.6	16	6.6	11	6.5		2	
	16	15	20	25	30	40	50	60	54	H+23	20	6	30	42	6.6	16	6.6	11	6.5		2	
	20	20	25	30	40	50	60	80	67	H+29	25	8	35	50	9	19	9	14	9	2	M8通孔	
	25	20	25	30	40	50	60	80	67	H+31	30	8	35	50	9	22	9	14	9	2		
	30	25	30	40	50	60	80	85	H+33	35	10	45	65	6.6	24	9	14	9	3			
	35	25	30	40	50	60	80	85	H+36	35	10	45	65	6.6	27	9	14	9	3			
	40	30	40	50	60	80	100	H+38	40	10	60	80	9	29	9	14	9	3	M8深度16			
	50	40	50	60	80	125	H+51	50	15	75	100	11	38	14	20	13	3	M12深度24				

