



定位销

带肩型

标准型 · P尺寸固定型



型号(1代码·2D) — (3P)
DAJJB6 — 6


■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 代码 7 天发货






代码		材质	表面处理	硬度
圆型	多棱型			
DAJJB	DAJDJ	SKS3	—	淬火硬度60~63HRC
DAEAKRL	DAECKRL		镀硬铬,抛光 厚度3~5μm	淬火硬度56~61HRC 镀层硬度850HV~
DASJJB	DAECS	SUS304	—	—
DAEBJRL	DAECJRL	SUJ2	镀硬铬,抛光 厚度3~5μm	淬火硬度56~61HRC 镀层硬度850HV~
DAEBSSR	DAECSSR	SUS440C	—	—



■ D尺寸公差

D尺寸	m6
2	+0.008
3	+0.002
4	—
5	+0.012
6	+0.004
8	+0.015
10	+0.006
12	—
13	+0.018
16	+0.007
20	+0.021
	+0.008

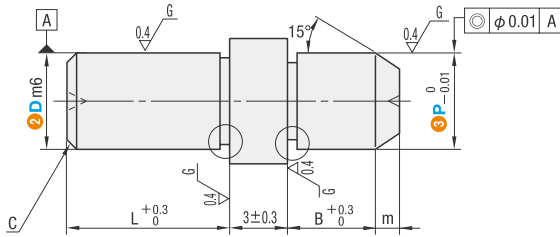

D(P) ≥ 3时
a=1.0
d=D(P)-0.2

D(P) < 3时
a=0.5
d=D(P)-0.1

型号		L	B	m	H	(W)	C
①代码	②D						
<圆型>	2	4	2	0.5	6	—	0.5
<多棱型>	3	5	2	1	6	1	0.5
	4	5	3	1	6	1.2	1.0
	5	10	5	2	8	1.5	1.0
	6		4	5	6	1.8	1.0
	8	15	6	3	11	2.2	1.5
	10	15	8	3	13	3	2
	12	15	8	3	15	3.2	2
	13	22	8	4	16	3.5	2
	16	22	10	4	19	4	3
	20	30	10	5	23	5.5	3

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613