



型号(①代码·②A) — ③B — ④L — ⑤T
DBDPCH16 — 10 — 50 — 5

■请按步骤①~⑤选择型号和参数后进行订购。




型号区分: ⑦天发货

■ 板型



代码	类型	材质	表面处理
DBDPCH	板型	S45C	发黑
DBDQCN			无电解镀镍
DBDRPB		聚甲醛(白色)	—

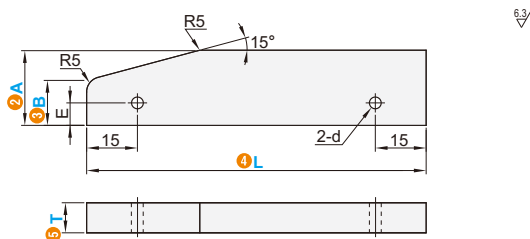

型号		③B 最小单位1	④L 最小单位10	⑤T 选择	E	d
① 代码	② A					
DBDPCH DBDQCN DBDRPB	16	7~12	40~200	5 9 12	6	4.5
	19					
	22	12~15	50~200		8	5.5
	25					
	32	13~25	70~200		10	6.5



型号(①代码·②A) — ③B — ④L — ⑤T — (AC-SC)
DBDPCH16 — 10 — 50 — 5 — AC

代码	变更为两侧 对称切割型	局部淬火
	AC	SC
技术说明	选型方法 AC	选型方法 SC ▨部分进行淬火。 ① 适用于S45C材质。 ① 淬火硬度43~48HRC,深度0.5~1.0。

