



型号(1 代码·2 D)

DAFPS6
DAFPST10

3 P

P6.50
P10.50

4 L

L10
L8

5 B

B8.0
B6.0

6 E

E2.0
E2.0

■ 请按步骤①~⑥选择
型号和参数后进行订购。



型号区分:



代码

7 天发货

■ 标准型



代码	材质	表面处理	硬度
DAFPS	SKS3	—	淬火硬度60~63HRC
DACFPS	SUS440C	—	淬火硬度50~55HRC
DASFPS	SUS304	—	—

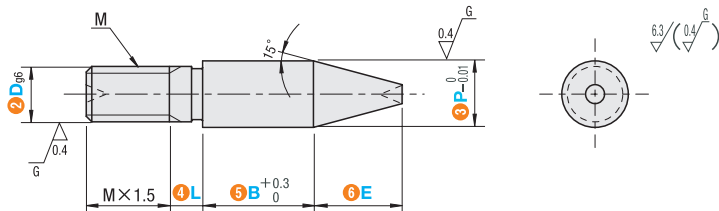


型号		3 P	4 L	5 B	6 E	M
1 代码	2 D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm	
DAFPS DACFPS DASFPS	3	3.50~6.00	0~12	2.0~10.0	0.5~10.0	M3
	4	4.50~7.00	0~12	2.0~10.0	0.5~10.0	M4
	5	5.50~8.00	0~12	2.0~10.0	0.5~10.0	M5
	6	6.50~10.00	0~12	2.0~12.0	0.5~10.0	M6
	8	9.00~13.00	0~12	2.0~15.0	0.5~10.0	M8
	10	10.00~13.00	0~12	2.0~20.0	0.5~10.0	M10

■ 三角型



代码	材质	表面处理	硬度
FEPST	SKS3	—	淬火硬度60~63HRC
CFEPST	SUS440C	—	淬火硬度50~55HRC
SFEPST	SUS304	—	—

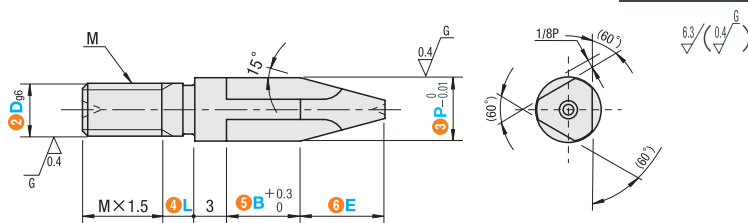

型号		3 P	4 L	5 B	6 E	M
1 代码	2 D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm	
DAFPST DACFPST DASFPST	3	3.50~6.00	0~12	2.0~10.0	0.5~10.0	M3
	4	4.50~7.00	0~12	2.0~10.0	0.5~10.0	M4
	5	5.50~8.00	0~12	2.0~10.0	0.5~10.0	M5
	6	6.50~10.00	0~12	2.0~12.0	0.5~10.0	M6
	8	9.00~13.00	0~12	2.0~15.0	0.5~10.0	M8
	10	10.00~13.00	0~12	2.0~20.0	0.5~10.0	M10



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达