



型号(1代码·2D) — 3P — 4B — 5T
DASAA8 — P6.5 — B7.5 — T8.2

■ 请按步骤1~5选择型号和参数后进行订购。



型号区分: 代码 8 天发货




代 码				材质	硬 度	表面 处理
圆法兰型		两面切割法兰型				
圆 型	多棱型	圆 型	多棱型			
DASAA	DASDA	DATAA	DATDA	SKS3	淬火硬度60～63HRC	—
DAKZS	—	DAKXS	—	SUS304	—	—
DAKZSL	—	DAKXSL	—	SUS304	镀层硬度850HV～	镀硬铬 厚度3～5μm

■ D尺寸公差

D	h7
5 · 6	0 -0.012
8 · 10	0 -0.015
12 · 16	0 -0.018
20	0 -0.021


6.3 / (0.4 / 6)

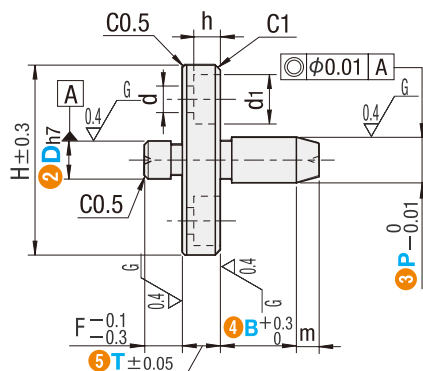


(圆型) (多棱型) (W)



● 圆型



● 两平面型



型号		3P	4B	5T	F	H	G	P.C.D.	d	d1	h	m	(W)
1代码	2D	最小单位0.01mm	最小单位0.1mm	最小单位0.1mm									
圆法兰型 两面切割法兰型 ①适用于D≥8 <圆型> DASAA DATAA DAKZS DAKXS DAKZSL DAKXSL	5	3.00~ 6.00	3.0~10.0	5.0~10.0	5	25	—	16	3.5	6.5	3.5	3	1.5
	6	4.00~ 7.00	3.0~12.0	5.0~10.0	5	25	—	16	3.5	6.5	3.5	3	1.8
	8	6.00~ 9.00	3.0~15.0	7.0~15.0	5	36	16	24	5.5	9.5	5.5	4	2.2
	10	7.00~11.00	4.0~20.0	7.0~15.0	5	36	16	24	5.5	9.5	5.5	4	3
	12	8.00~12.00	4.0~20.0	7.0~15.0	5	36	16	24	5.5	9.5	5.5	4	3.2
<多棱型> DASDA DATDA	16	13.00~16.00	5.0~20.0	11.0~20.0	10	54	24	37	9	14	9	5	4
	20	16.00~20.00	5.0~20.0	11.0~20.0	10	54	24	37	9	14	9	5	5.5



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达