



1 型号 · 2 d
BAUTF6



型号区分: 7 天发货
代码

■ 聚氨酯包覆
滚子轴承随动器



■ 分离 · R型

(带密封圈)
BAUTR

(无密封圈)
BAUTRR

■ 分离 · 圆柱型






(带密封圈)
BAUTF

(无密封圈)
BAUTFR

■ 非分离 · 圆柱型

(带密封圈)
BAUGF

(无密封圈)
BAUGFR



材质 本体 SUJ2

聚氨酯肖氏A90(黑色)

■ 分离型 · 带密封圈 (R · 圆柱型共通)

型号 1 代码	2 d	D	a	B	B ₁	e	f	容许负载 (N)	极限转速 (rpm)	重量 (g)
BAUTR	6	19	14	13.8	14	2.5	0.8	96	1960	29
BAUTF	8	24	17.5	17.5	17.5	2.5	0.8	115	1660	44.5

■ 分离型 · 无密封圈 (R · 圆柱型共通)

型式 Type	d	D	d _r	B	B ₁	r	容许负载 (N)	极限转速 (rpm)	重量 (g)
BAUTRR	6	19	10	9.8	10	0.5	96	4900	22.3
BAUTFR	8	24	12	11.8	12	0.5	115	4150	33.5
	10	30	14	11.8	12	0.5	147	3475	58

■ 非分离 · 圆柱型

型号 1 代码	2 d	D	a	B	B ₁	f	容许负载 (N)	极限转速 (rpm)	重量 (g)
BAUGF	5	16	12	11	12	0.5	100	6525	19.5
BAUGFR	6	19	14	13	14	0.5	125	5220	26.5
	8	24	17.5	17.5	17.5	0.5	150	5910	50
	10	30	23.5	23.5	23.5	0.5	190	4785	74



型号 (1 代码 · 2 Dg6) — (3 L)
BAT6 — 30

■ 请按步骤 1~3 选择型号和参数后进行订购。




型号区分: 7 天发货
代码


■ 滚子轴承随动器用销售
挡圈型



● 挡圈用



● 带肩扣环用

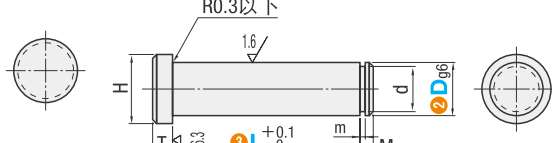

代码	材质	表面处理
挡圈用 BAT	带肩扣环用 BAJ	S45C
		发黑

25 / (6.3 / 1.6)

1 代码	2 Dg6	3 L 指定单位mm	d	容差	m	容差	M	T	H
(挡圈用) BAT	5	-0.004	20~44	4	+0.075	0.7	2	2	10
	6	-0.012	22~46	5	0	0.9	3	3	11
	8	-0.005	22~47	7	+0.009	1.15	4	4	13
	10	-0.014	25~48	9.6	-0.009	1.15	3	3	15
	12	-0.006	25~48	11.5	0	1.15	4	4	17
(带肩挡圈用) BAJ									



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达